


**LOW D.F., DISC CERAMIC CAPACITOR (BN AND ZM SERIES)**

**APPLICATION:**

- HIGH-VOLTAGE DC POWER SUPPLIES OR DISCHARGES. (Lasers, X-ray apparatus, Mosquito kill lamps, etc)
- HIGH FREQUENCY AC CIRCUITS.
- NOISE SUPPRESSOR OR HORIZONTAL OUT-PUT CIRCUTS. (TV, Monitor, etc)

	BN	ZM
TEMP. CHARAC.	B(Y5P)	D(T3M)
D. F. MAXIMUM	0.5%	0.1%

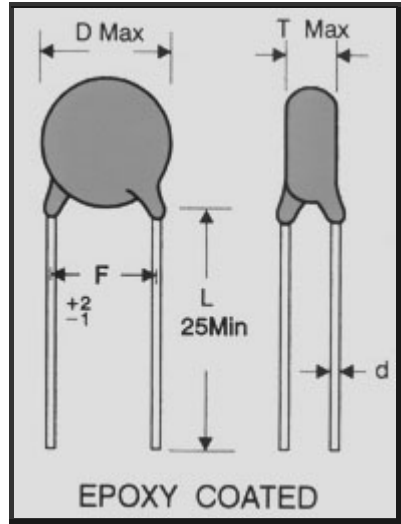

T.C. W.V.	BN	ZM	DIMENSION			
			D	F	T	d
1KV (3A)	101 ~561	101 ~561	06	5	4	0.6
	~102	~102	07	5	4	0.6
	~122	~122	08	5	4	0.6
	~202	~202	10	7.5	4	0.6
	~302	~302	12	7.5	4	0.6
	~339	~339	14	10	4	0.6
	~472	~472	16	10	4	0.6
2KV (3D)	101 ~331	101 ~331	06	5	4	0.6
	~391	~471	07	5	4	0.6
	~561	~681	08	5	4	0.6
	~102	~102	10	7.5	4	0.6
	~152	~152	12	7.5	4	0.6
	~222	~222	14	10	4	0.6
	~302	~302	16	10	4	0.6
3KV (3F)	∅	101 ~221	06	7.5	5	0.6
	∅	~331	07	7.5	5	0.6
	∅	~471	08	7.5	5	0.6
	∅	~821	10	7.5	5	0.6
	∅	~102	12	7.5	5	0.6
	∅	~152	14	10	5	0.6
	∅	~202	16	10	5	0.6
6.3KV (3J)	∅	~221	07	6.5	6	0.8
	∅	~331	08	7.5	6	0.8
	∅	~471	10	7.5	6	0.8
	∅	~102	13	10	6	0.8
	∅	~152	16	10	6	0.8
8KV (3K)	∅	~151	07	10	6	0.8
	∅	~221	08	10	6	0.8
	∅	~391	10	10	6	0.8
	∅	~681	13	10	6	0.8
	∅	~122	16	10	6	0.8
10KV (4K)	∅	~121	07	10	7	0.8
	∅	~181	09	10	7	0.8
	∅	~331	11	10	7	0.8
	∅	~561	14	10	7	0.8
	∅	~102	17	10	7	0.8
15KV (4C)	∅	~820	08	10	7	0.8
	∅	~151	10	10	7	0.8
	∅	~331	13	10	7	0.8
	∅	~561	16	10	7	0.8