

NVF4-3 & NVF4-4



NVF4-3
29×29×26.5



NVF4-4
29×29×26.5(+16)

Features	
<ul style="list-style-type: none"> Small size. Contact load capacity up to 80A. Suitable for automobile. PC board mounting and direct insert mounting available. 	

Ordering Information	
NVF4-3	C Z 30 b DC12V C D
1	2 3 4 5 6 7 8
1 Part number: NVF4-3, NVF4-4 (Insulation Bracket), NVF4-4a (Metal Bracket)	5 Terminals: b: PCB type; a: plug in type
2 Contact arrangement: A:1A; B:1B; C:1C; U:1U	6 Coil rated voltage(V): DC:6,12,24
3 Enclosure: S: Sealed type; Z: Dust cover;	7 Contact material: C:AgCdO; N:AgNi; NIL: AgSnO ₂
4 Contact current: A Form:50A,80A; B Form:40A,70A; C Form:40,50A,70A,80A; U Form:2×25A	8 Coil transient suppression: D: with diode.; 2D:with two diodes.; R: with resistance.; DR: with diode and resistance; NIL: standard

Contact Data	
Contact Arrangement	1A (SPSTNO) , 1B (SPSTNC) ,1C (SPDT(B-M)) ,1U (SPSTNODM)
Contact Material	AgSnO ₂ , AgNi
Contact Rating (resistive)	1A 1B 1C 1U
	50A,80A/14VDC 40A,70A/14VDC NO:50A,80A/14VDC NC:40A,70A/14VDC 2×25A/14VDC
Max. Switching Power	980W
Max. Switching Voltage	75VDC
Max. Switching Current	80A
Contact Resistance or Voltage drop	≤30mΩ Item 4.12 of IEC 61810-7
Operation life	Electrical: 10 ⁵ Item 4.30 of IEC 61810-7 Mechanical: 10 ⁷ Item 4.31 of IEC 61810-7

Coil Parameter								
Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pickup voltage VDC(max) (65% of rated voltage)	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
006-1800	6	7.8	20	3.9	0.6			
012-1800	12	15.6	80	7.8	1.2	1.8	≤7	≤5
024-1800	24	31.2	320	15.6	2.4			


CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition

Insulation Resistance ¹⁾	100MΩ min (at 500VDC)	Item 7 of IEC 61810-5
Dielectric Strength ¹⁾		
Between contacts	50Hz 500V	Item 6 of IEC 61810-5
Between contact and coil	50Hz 500V	Item 6 of IEC 61810-5
Shock resistance	147m/s ² 11ms	IEC68-2-27 Test Ea
Vibration resistance	10~40Hz double amplitude 1.5mm	IEC68-2-6 Test Fc
Terminals strength	8N 4N(PC type)	IEC68-2-21 Test Ua 2
Solderability	235°C ±2°C 3±0.5s	IEC68-2-20 Test Tamethod 1
Ambient Temperature	-40~125°C	
Relative Humidity	85% (at 40°C)	IEC68-2-3 Test Ca
Mass	46g(NVF4-3);48g(NVF4-4)	

Note: 1). When testing, coil terminals should be connected, if coil transient suppression is installed in relay .

Dimensions

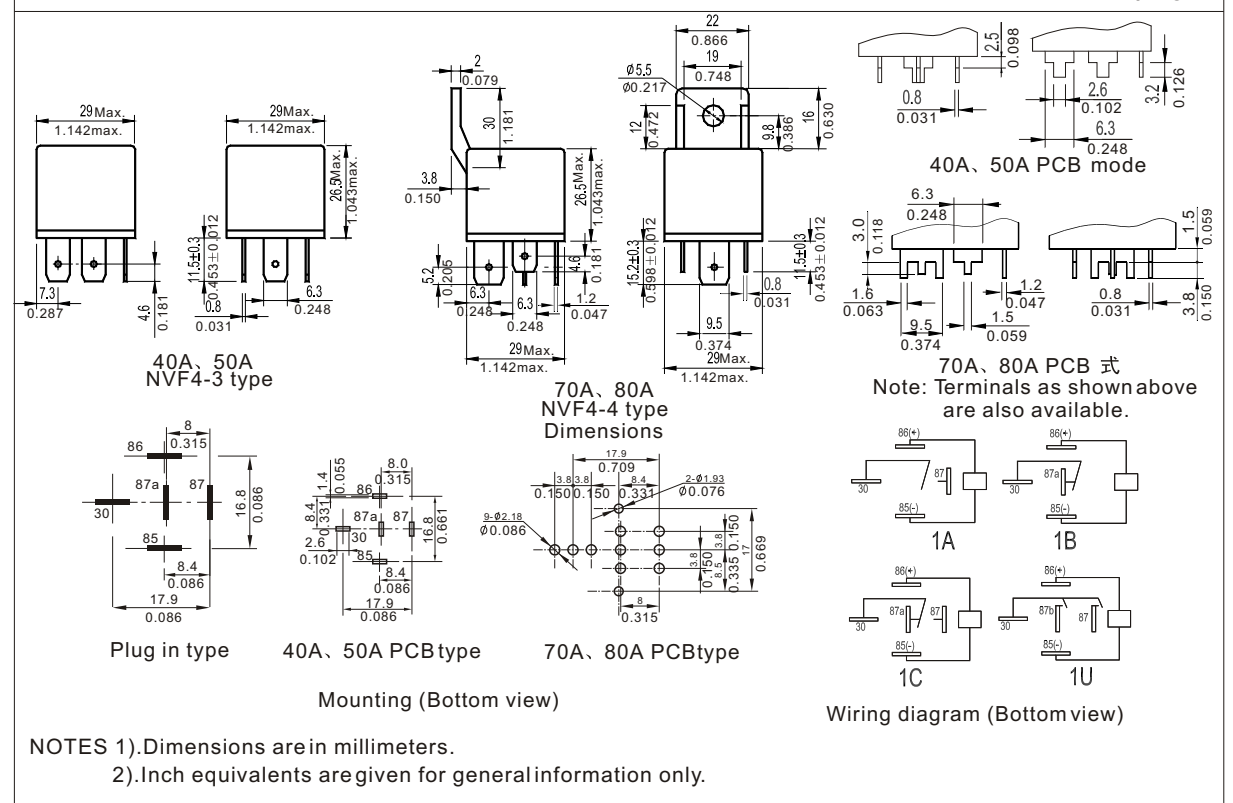

Reference Data

