



HA SERIES
HA 系列 **CE**

HA系列接插件技术特性

Specifications/规范	DIN VDE 0627 DIN VDE 0110 DIN EN 61984	Hoods/Housings/金属上壳/底座	
Number of contacts/接插件针数	3,4,10,16,32(2×16)+PE	Material 材料	die cast aluminium 铸铝合金
Inserts(HA-003/004)/接插体		表面处理 Surface	Powder-coated 高温粉末镀层 灰色RAL7037
Working current 工作电流 (see current carrying capacity 见电流负载图)	10A	Locking element 锁定装置	stainless steel, steel-zinc plated 不锈钢或铁镀锌
Working voltage 工作电压	230/400V	Temperature range 工作温度范围	-40℃...+125℃
Rated impulse voltage 额定脉冲耐受电压	4KV	Degree of protection acc.to DIN EN 60529 防护等级	IP65
Pollution degree 污染等级	3	Contacts/接插针	
Insulation resistance 隔离电阻	$\geq 10^{10} \Omega$	Material 材料	copper alloy 铜
Material 材料	Polycarbonate	Surface 表面处理	镀银 hard silver-plated(3µm Ag) 镀金 hard gold-plated (2µm Au over 3µm Ni)
Temperature rang 工作温度范围	-40℃...+125℃	Contact resistance 接触电阻	$\leq 1m \Omega$
Flammability acc.to U194 阻燃等级(据UL94)	V 0	Terminal -mm ² -AWG 接线形式	screw terminal 1.0-2.5mm ² 18-14 螺钉压接
Working voltage acc.to UL/CSA 据UL/CSA 工作电压	600V	-Screw terminal tightening/test torque 螺钉拧紧力距/测试力矩	0.25Nm
Mechanical working life -mating cycles 可拔插次数	≥ 500		


Current carrying capacity/电流负载能力

The current carrying is limited by maximum temperature of materials for inserts and contacts including terminals

电流负载能力所受到的限制主要来自自己包含接插针的接插体可承受的最大温度。

Control and test procedures according to DIN IEC 60512-3

测试和控制过程依据DIN IEC 60512-3

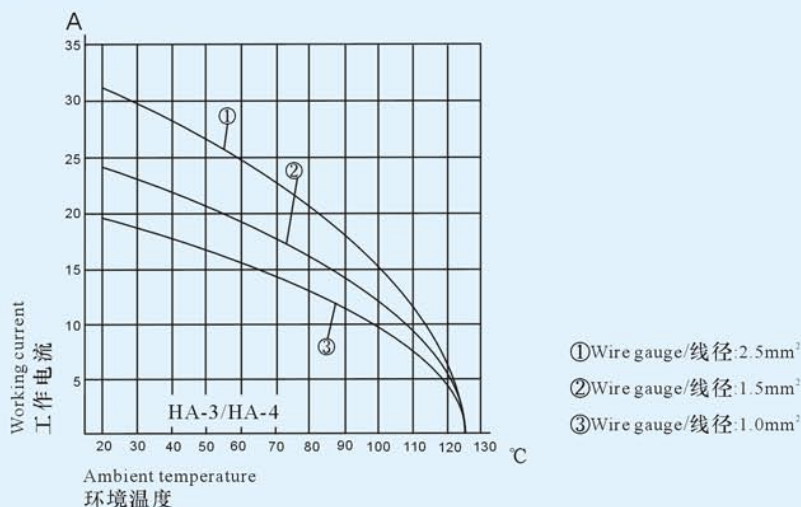


Hood


Insert

Housing

Hood: Top entry
 外壳上壳: 正面进线
 Standard construction / 标准结构
 H3A-TE-2B-M20(PG11)

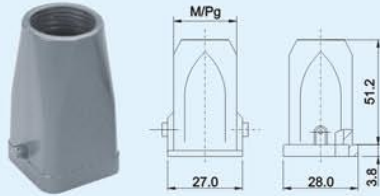

Hood: Side entry
 外壳上壳: 侧面进线
 Standard construction / 标准结构
 H3A-SE-2B-M20(PG11)


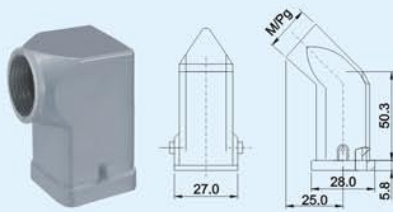


HA-003-M

HA-003-F



Contact arrangement view from termination side
 接插针排序





HA-004-M


HA-004-F



Contact arrangement view from termination side
 接插针排序




Mounting example
 安装示意图



*常备螺纹规格用蓝色表示
 *Stock items in blue color


Bulkhead mounted
 外壳下壳: 开孔安装

H3A-BK-1L

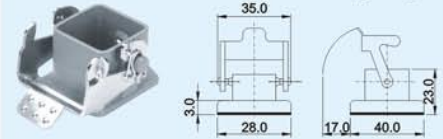


Bulkhead mounted side entry
 外壳下壳: 开孔安装侧出

H3A-BK-1L-SE

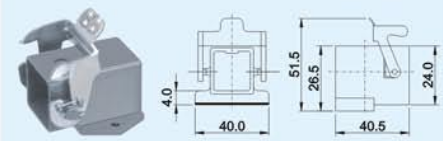

Surface mounted
 外壳下壳: 表面安装

H3A-SF-1L

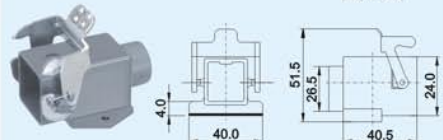

Cable to Cable
 外壳下壳: 电缆对接

H3A-CCT-1L-M20(PG11)

