



## TMOV IN HEAT STRINK TUBE HT14D SPECIFICATION

Model Number 14mm	Maximum Allowable Voltage		Varistor Voltage V1mA	Clamping Voltage (Max.)		Maximum Peak Current (8/20μS)		Maximum Energy (JOULE)		Rated Power (w)	Typical Capacitance (Reference) @1KHZ (pf)
	Acrms (V)	DC (V)		VC (V)	IP (A)	1Time (A)	2Times (A)	10/1000 μS	2ms		
	HT14D180KM	11	14	18(15.5-21.0)	36	20	2000	1000	7	4.7	0.10
HT14D220KM	14	18	22(20-24)	43	20	2000	1000	8	5.7	0.10	9100
HT14D270KM	17	22	27(24-30)	53	20	2000	1000	10	6.9	0.10	7400
HT14D330KM	20	26	33(30-36)	65	20	2000	1000	12	8.4	0.10	6100
HT14D390KM	25	31	39(35-43)	77	20	2000	1000	13	9.9	0.10	5100
HT14D470KM	30	38	47(42-52)	93	20	2000	1000	17	11.9	0.10	4300
HT14D560KM	35	45	56(50-62)	110	20	2000	1000	20	14.2	0.10	3600
HT14D680KM	40	56	68(61-75)	135	20	2000	1000	24	17.3	0.10	2900
HT14D820KM	50	65	82(74-90)	135	100	6000	5000	27	20.5	0.60	2400
HT14D101KM	60	85	100(162-198)	165	100	6000	5000	33	25	0.60	2000
HT14D121KM	75	100	120(108-132)	200	100	6000	5000	40	30	0.60	1700
HT14D151KM	95	125	150(135-165)	250	100	6500	5000	53	37.5	0.60	1300
HT14D181KM	115	150	180(162-198)	300	100	6500	5000	60	42	0.60	1100
HT14D201KM	130	170	200(185-225)	340	100	6500	5000	70	50	0.60	1000
HT14D221KM	140	180	220(198-225)	360	100	6500	5000	78	55	0.60	900
HT14D241KM	150	200	240(216-264)	395	100	6500	5000	84	60	0.60	830
HT14D271KM	175	225	270(243-297)	455	100	6500	5000	99	70	0.60	740
HT14D301KM	190	250	300(270-330)	500	100	6500	5000	108	75	0.60	670
HT14D331KM	210	275	330(297-363)	550	100	6500	5000	115	80	0.60	610
HT14D361KM	230	300	360(324-396)	595	100	6500	5000	130	90	0.60	560
HT14D391KM	250	320	390(351-429)	650	100	6500	5000	140	100	0.60	510
HT14D431KM	275	350	430(387-473)	710	100	6500	5000	155	110	0.60	460
HT14D471KM	300	385	470(423-517)	775	100	6500	5000	175	125	0.60	430
HT14D511KM	320	415	510(459-561)	845	100	6500	5000	190	136	0.60	390
HT14D561KM	350	460	560(504-616)	925	100	6500	5000	190	136	0.60	360
HT14D621KM	385	505	620(558-682)	1025	100	6500	5000	190	136	0.60	320
HT14D681KM	420	560	680(612-748)	1120	100	6500	5000	190	136	0.60	290
HT14D751KM	460	615	750(675-825)	1240	100	6500	5000	210	150	0.60	270
HT14D781KM	485	640	780(702-858)	1290	100	6500	5000	220	155	0.60	260
HT14D821KM	510	670	820(738-902)	1355	100	6500	5000	235	165	0.60	240
HT14D911KM	550	745	910(819-1001)	1500	100	6500	5000	255	180	0.60	220
HT14D102KM	625	825	1000(900-1100)	1650	100	6500	5000	280	200	0.60	200
HT14D112KM	680	895	1100(990-1210)	1815	100	6500	5000	310	220	0.60	180

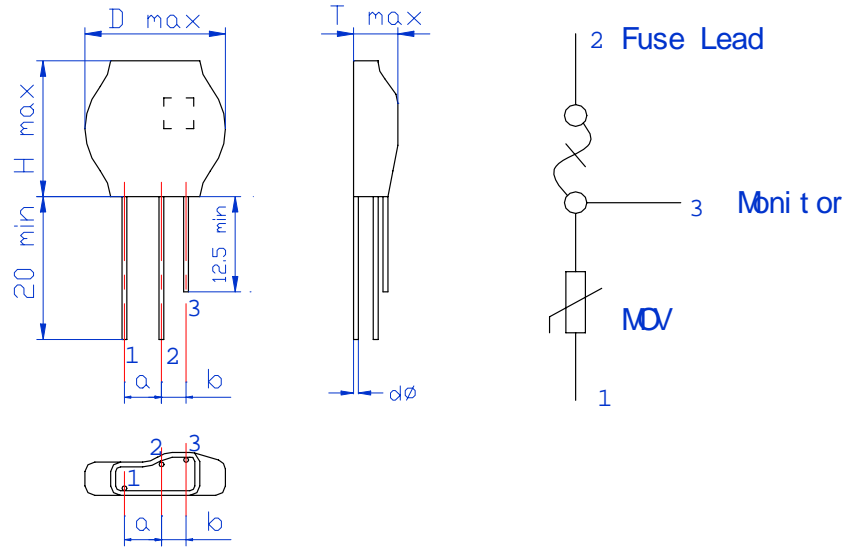

**Dmax: 17mm**

**Hmax: 22mm**

**d $\phi$ (Nom.): 0.8mm**

**a: 2.5mm +/- 1.2mm**

**b: 5.0mm +/- 1.2mm**