


## TMOV IN HEAT STRINK TUBE HT25D SPECIFICATION

Model Number 25mm	Maximum Allowable Voltage		Varistor Voltage V1mA (V)	Clamping Voltage (Max.)		Maximum Peak Current (8/20 $\mu$ S)		Maximum Energy JOULE)		Rated Power (w)	Typical Capacitance (Reference) @1KHZ (pf)
	Acrms (V)	DC (V)		VC (V)	IP (A)	1Time (A)	2Times (A)	10/1000 $\mu$ S	2ms		
	HT25D201KM	130	170	200(185-225)	340	150	20000	14000	190	140	1.20
HT25D221KM	140	180	220(198-242)	360	150	20000	14000	200	150	1.20	2900
HT25D241KM	150	200	240(216-264)	395	150	20000	14000	220	160	1.20	2650
HT25D271KM	175	225	270(243-297)	455	150	20000	14000	255	180	1.20	2400
HT25D301KM	190	250	300(270-330)	500	150	20000	14000	275	200	1.20	2100
HT25D331KM	210	275	330(297-363)	550	150	20000	14000	300	220	1.20	1900
HT25D361KM	230	300	360(324-396)	595	150	20000	14000	330	240	1.20	1750
HT25D391KM	250	320	390(351-429)	650	150	20000	14000	360	260	1.20	1600
HT25D431KM	275	350	430(387-473)	710	150	20000	14000	380	280	1.20	1500
HT25D471KM	300	385	470(423-517)	775	150	20000	14000	440	300	1.20	1400
HT25D511KM	320	415	510(459-561)	845	150	20000	14000	440	300	1.20	1250
HT25D561KM	350	460	560(504-616)	925	150	20000	14000	440	300	1.20	1150
HT25D621KM	385	505	620(558-682)	1025	150	20000	14000	440	300	1.20	1050
HT25D681KM	420	560	680(612-748)	1120	150	20000	14000	460	320	1.20	950
HT25D751KM	460	615	750(675-825)	1240	150	20000	14000	510	350	1.20	850
HT25D781KM	485	640	780(702-858)	1290	150	20000	14000	530	360	1.20	850
HT25D821KM	510	670	820(738-902)	1355	150	20000	14000	570	380	1.20	800
HT25D911KM	550	745	910(819-1001)	1500	150	20000	14000	620	430	1.20	700
HT25D102KM	625	825	1000(900-1100)	1650	150	20000	14000	685	460	1.20	650
HT25D112KM	680	895	1100(990-1210)	1815	150	20000	14000	770	500	1.20	600

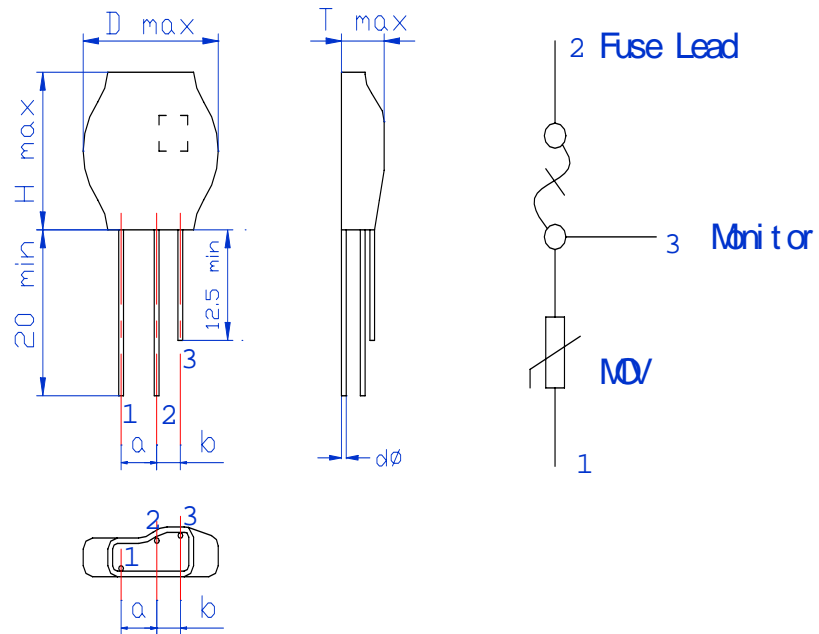

**Dmax:28.5mm**  
**Hmax: 35mm**  
**d $\Phi$ (Nom.): 1.0mm**  
**a: 7.5mm +/-**  
**1.2mm**  
**b: 5.0mm +/-**  
**1.2mm**