

JK MSMD SERIES OF POLYMER PTC RESETTABLE FUSE SPECIFICATION

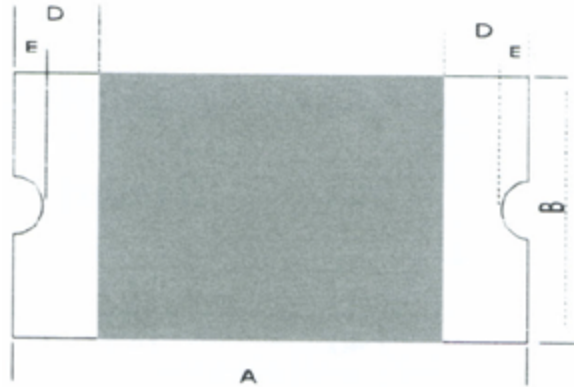
Appearance of Products :

Figure 1

Electrical characteristics (25°C)

Model	V _{max} (V)	I _{max} (A)	I _h (A)	R _{max} (Ω)	R _{min} (Ω)	P _d (W)
JK-MSMD050	15.0	40	0.50	1.00	0.15	0.8
JK-MSMD075	13.2	40	0.75	0.45	0.11	0.8
JK-MSMD110	6.0	40	1.10	0.21	0.04	0.8
JK-MSMD125	6.0	40	1.25	0.18	0.05	0.8
JK-MSMD150	6.0	40	1.50	0.15	0.03	0.8
JK-MSMD160	6.0	40	1.60	0.06	0.02	0.8

Product dimensions (mm)

Model	A(max)	B(max)	C(max)	D(max)	E(max)
JK-MSMD050	4.73	3.41	0.75	0.30	0.25
JK-MSMD075	4.73	3.41	0.75	0.30	0.25
JK-MSMD110	4.73	3.41	0.75	0.30	0.25
JK-MSMD125	4.73	3.41	1.25	0.30	0.25
JK-MSMD150	4.73	3.41	0.75	0.30	0.25
JK-MSMD160	4.73	3.41	0.75	0.30	0.25