

JK16 SERIES OF POLYMER PTC RESETTABLE FUSE SPECIFICATION

Appearance of Products :

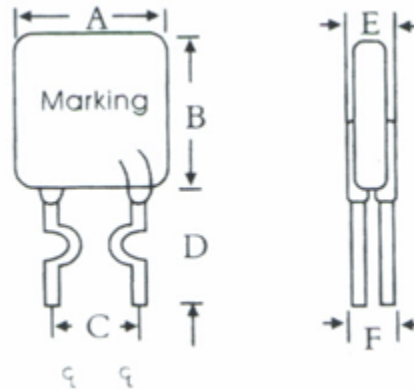


Figure 1

Electrical characteristics (25°C)

Model	Vmax (V)	I _{max} (A)	I _h (A)	R _{max} (Ω)	R _{min} (Ω)	P _d (W)
JK16-300	16	40	3.0	34	75	2.3
JK16-400	16	40	4.0	20	63	2.4
JK16-500	16	40	3.0	14	32	2.6
JK16-600	16	40	6.0	9	30	2.8
JK16-700	16	40	7.0	6	18	3.0
JK16-900	16	40	9.0	4	13	3.3
JK16-1000	16	40	10.0	3	9	3.7
JK16-1100	16	40	11.0	3	9	3.7
JK16-1200	16	40	12.0	2	9	4.2
JK16-1400	16	40	14.0	2	8	4.6

Product dimensions (mm)

Model	A(max)	B(max)	C(max)	D(max)	E(max)
JK16-300	7.6	9.6	5.1	7.6	3.0
JK16-400	12.8	13.0	5.1	7.6	3.0
JK16-500	12.8	13.0	5.1	7.6	3.0
JK16-600	13.3	17.1	5.1	7.6	3.0
JK16-700	13.3	17.1	5.1	7.6	3.0
JK16-900	15.8	18.4	10.2	7.6	3.0
JK16-1000	16.8	21.4	10.2	7.6	3.0
JK16-1100	23.1	24.6	10.2	7.6	3.5
JK16-1200	23.1	24.6	10.2	7.6	3.5
JK16-1400	23.1	24.6	10.2	7.6	3.5