

## JK30 SERIES OF POLYMER PTC RESETTABLE FUSE SPECIFICATION

Appearance of Products :

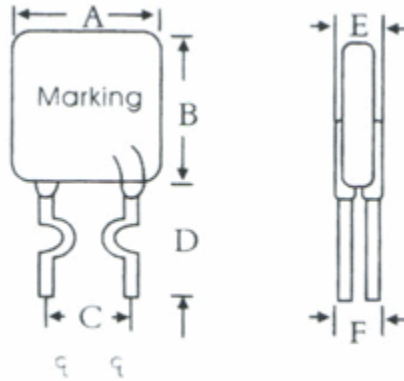


Figure 1




Figure 2

Electrical characteristics (25°C)

Model	V <sub>max</sub> (V)	I <sub>max</sub> (A)	I <sub>h</sub> (mA)	R <sub>max</sub> (Ω)	R <sub>min</sub> (Ω)	Pd (W)	Maximum Contour Size(mm)					
							A	B	C	D	E	F
JK30-090	30	40	0.90	0.12	0.070	0.60	7.40	12.2	5.10	7.6	3.0	0.9
JK30-110	30	40	1.10	0.10	0.050	0.70	7.40	14.2	5.10	7.6	3.0	0.9
JK30-135	30	40	1.35	0.08	0.040	0.80	8.90	13.5	5.10	7.6	3.0	0.9
JK30-160	30	40	1.60	0.07	0.030	0.90	8.90	15.2	5.10	7.6	3.0	0.9
JK30-185	30	40	1.85	0.06	0.030	1.00	10.2	15.7	5.10	7.6	3.0	0.9
JK30-250	30	40	2.50	0.04	0.020	1.20	11.4	18.3	5.10	7.6	3.0	0.9
JK30-300	30	40	3.00	0.05	0.020	2.00	11.4	17.3	5.10	7.6	3.0	1.2
JK30-400	30	40	4.00	0.03	0.010	2.50	14.0	20.1	5.10	7.6	3.0	1.2
JK30-500	30	40	5.00	0.03	0.010	3.00	14.0	24.9	10.2	7.6	3.0	1.2
JK30-600	30	40	6.00	0.02	0.005	3.50	16.5	24.9	10.2	7.6	3.0	1.2
JK30-700	30	40	7.00	0.02	0.005	3.80	19.1	26.7	10.2	7.6	3.0	1.2
JK30-800	30	40	8.00	0.02	0.005	4.00	21.6	29.2	10.2	7.6	3.0	1.2
JK30-900	30	40	9.00	0.01	0.005	4.20	24.1	29.7	10.2	7.6	3.0	1.2