

JK60 SERIES OF POLYMER PTC RESETTABLE FUSE **SPECIFICATION**

The rated operating voltage of JK Series of PTC is 60v while its holding current being 100mA-3.75A. this series of resettable fuse apply to the circuits with rather higher rated operating voltage, for example in light fixture, computer, UPS, fire alarm and security protection systems, satellite television-reception system and other testing as well as measuring equipment.

Appearance of Products :

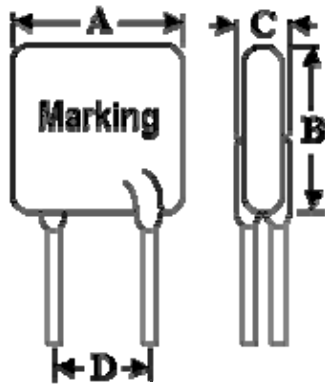


Figure 1

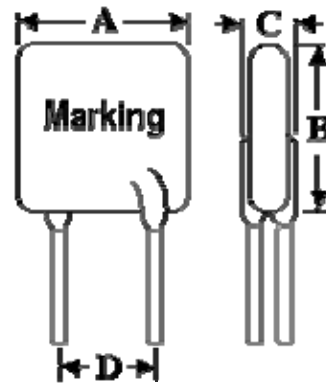


Figure 2

Model of Product and Technical Parameter

Model of Product	Resistance (Ω)	Maximum Voltage (V)	Maximum Current (A)	Non-Operation Current (A)	Maximum Contour Size (mm)				Appearance	
					A	B	C	D	Plate Shape	Outgoing Line Shape
JK60-010	2.50-4.50	60	40	0.10	7.4	12.7	3.1	5.1	Circular	Straight
JK60-017	3.30-5.21	60	40	0.17	7.4	12.7	3.1	5.1	Circular	Straight
JK60-020	1.83-2.84	60	40	0.20	7.4	12.7	3.1	--	Circular	--
JK60-025	1.25-1.95	60	40	0.25	7.4	12.7	3.1	5.1	Circular	Straight
JK60-030	0.88-1.38	60	40	0.30	7.4	13	3.1	5.1	Circular	Straight
JK60-040	0.55-0.89	60	40	0.40	7.4	13.5	3.1	5.1	Circular	Winding
JK60-050	0.50-0.80	60	40	0.50	7.8	13.7	3.1	5.1	Circular	Winding
JK60-065	0.31-0.50	60	40	0.65	9.7	14.5	3.1	5.1	Circular	Winding
JK60-075	0.25-0.42	60	40	0.75	10.4	15.2	3.1	5.1	Circular	Winding
JK60-090	0.20-0.33	60	40	0.90	11.7	15.2	3.1	5.1	Circular	Winding
JK60-110	0.15-0.27	60	40	1.10	13.0 ϕ 12.7	15.8	3.1	5.1	Square	Straight
JK60-135	0.12-0.21	60	40	1.35	14.5	18.0	3.1	5.1	Circular	Straight
JK60-160	0.09-0.16	60	40	1.60	16.3	21.3	3.1	5.1	Circular	Straight
JK60-185	0.08-0.14	60	40	1.85	17.8 ϕ 16.1	22.9	3.1	5.1	Square	Straight
JK60-250	0.05-0.10	60	40	2.50	21.3	26.4	3.1	10.2	Circular	Straight
JK60-300	0.04-0.08	60	40	3.00	24.9	30.0	3.1	10.2	Circular	Straight
JK60-375	0.03-0.06	60	40	3.75	28.5	33.5	3.1	10.2	Circular	Straight