


NON-FLAMMABLE COATED MOVS 34S
SPECIFICATION

Model Number 34mm	Maximum Allowable Voltage		Varistor Voltage	Clamping Voltage (Max.)		Maximum Peak Current (8/20 μ S)		Maximum Energy (JOULE)	Typical Capacitance (Reference)
	Acrms (V)	DC (V)	V1mA (V)	VC (V)	IP (A)	1 Time	2 Times	10/1000 μ S	@1KHZ (pf)
						(A)			
34S201K	130	170	200(185-225)	340	300	40000	30000	310	6800
34S221K	140	180	220(198-242)	360	300	40000	30000	330	6200
34S241K	150	200	240(216-264)	395	300	40000	30000	360	5700
34S271K	175	225	270(243-297)	455	300	40000	30000	390	5000
34S331K	210	275	330(297-363)	550	300	40000	30000	410	4100
34S361K	230	300	360(324-396)	595	300	40000	30000	460	3800
34S391K	250	320	390(351-429)	650	300	40000	30000	490	3500
34S431K	275	350	430(387-473)	710	300	40000	30000	550	3200
34S471K	300	385	470(423-517)	775	300	40000	30000	600	2900
34S511K	320	415	510(459-561)	845	300	40000	30000	640	2700
34S561K	350	460	560(504-616)	920	300	40000	30000	710	2400
34S621K	385	505	620(558-682)	1025	300	40000	30000	800	2200
34S681K	420	560	680(612-748)	1120	300	40000	30000	910	2000
34S751K	460	615	750(675-825)	1240	300	40000	30000	980	1800
34S781K	485	640	780(702-858)	1290	300	40000	30000	1020	1750
34S821K	510	670	820(738-902)	1355	300	40000	30000	1100	1650
34S911K	550	745	910(819-1001)	1500	300	40000	30000	1150	1500
34S951K	575	765	950(855-1045)	1570	300	40000	30000	1200	1430
34S102K	625	825	1000(900-1100)	1650	300	40000	30000	1250	1360
34S112K	680	895	1100(990-1210)	1815	300	40000	30000	1350	1250
34S122K	750	970	1200(1062-1300)	2000	300	40000	30000	1400	1200
34S142K	880	1150	1400(1245-1520)	2290	300	40000	30000	1450	1100
34S162K	1000	1200	1600(1414-1728)	2550	300	40000	30000	1500	1000

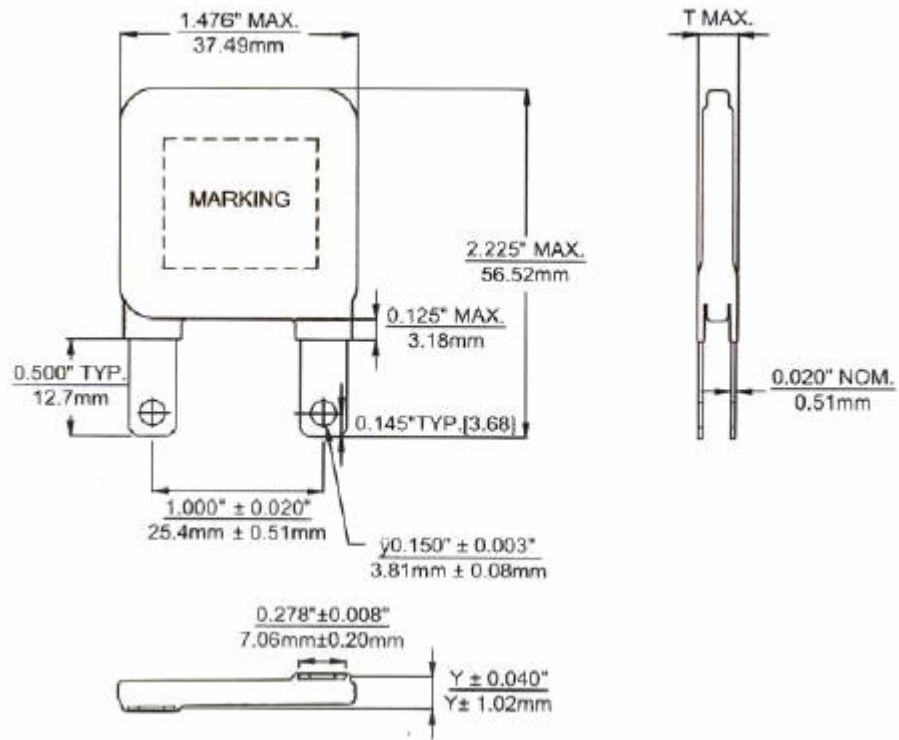

Electronic Alliancewww.eaa.net.au

Part No.	T _{max.}
34S201K	6.2
34S221K	6.3
34S241K	6.4
34S271K	6.6
34S331K	6.9
34S361K	7.1
34S391K	7.3
34S431K	7.5
34S471K	7.8
34S511K	8.0
34S561K	8.3
34S621K	8.7
34S681K	9.0
34S751K	9.4
34S781K	9.6
34S821K	9.8
34S911K	10.4
34S951K	10.8
34S102K	11.2
34S112K	11.8

Unit:mm
