




DEC-3.5

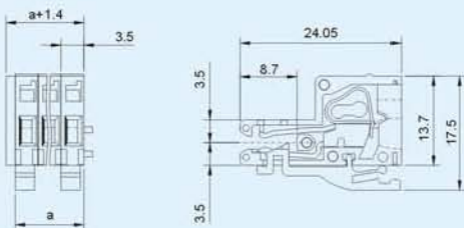

Pitch:3.5mm;Poles:2P~24P

Material

Wire guard: Stainless steel

Contact : Phosphor bronze, Tin plated

Housing : PA66, UL94V-0

Electrical

Rated voltage : 300V

Rated current : 8A

Contact resistance : 20m Ω

Insulation resistance : 5000M Ω /DC1000V

Withstanding voltage: AC2000/1Min

Withstanding voltage: 24-16AWG 1.0mm²

Mechanical

Temp.Range : -40 $^{\circ}$ C~+105 $^{\circ}$ C

Strip length : 7-8mm

材质及电镀

簧片 : 不锈钢

触点材料: 磷青铜, 镀锡

塑件 : PA66,UL94V-0

电气性能

额定电压: 300V

额定电流: 8A

接触电阻: 20m Ω

绝缘电阻: 5000M Ω /DC1000V


耐电压 : AC2000V/1Min

使用线径: 24-16AWG 1.0mm²


机械性能

温度范围: -40 $^{\circ}$ C~+105 $^{\circ}$ C

剥线长度: 7-8mm

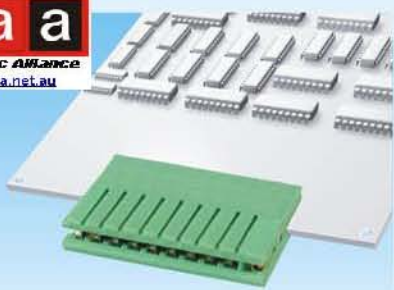

DECB-3.5

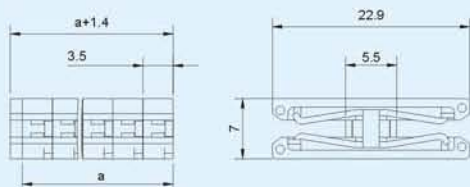

Pitch:3.5mm;Poles:2P~24P

• **Material**

Contact : Phosphor bronze,Tin plated
Housing : PA66,UL94V-0

• **Electrical**

Rated voltage : 300V
Rated current : 8A
Contact resistance : 20mΩ
Insulation resistance : 5000MΩ/DC1000V
Withstanding voltage: AC2000/1Min

• **Mechanical**

Temp.Range : -40°C~+105°C

• **材质及电镀**

触点材料: 磷青铜, 镀锡
塑件 : PA66,UL94V-0

• **电气性能**


额定电压: 300V
额定电流: 8A
接触电阻: 20mΩ
绝缘电阻: 5000MΩ/DC1000V
耐电压 : AC2000V/1Min

• **机械性能**

温度范围: -40°C~+105°C



**DEC-5.0
DEC-7.5**

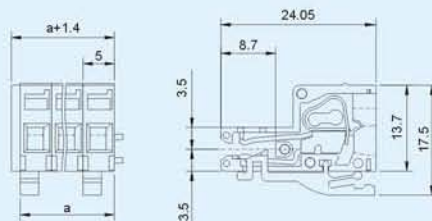

Pitch:5.0mm,7.5mm;Poles:2P~24P

• **Material**

Wire guard: Stainless steel
Contact : Phosphor bronze,Tin plated
Housing : PA66,UL94V-0

• **Electrical**

Rated voltage : 300V
Rated current : 10A
Contact resistance : 20mΩ
Insulation resistance : 5000MΩ/DC1000V
Withstanding voltage: AC2000/1Min
Withstanding voltage: 28-12AWG 2.5mm²

• **Mechanical**

Temp.Range : -40°C~+105°C
Strip length : 10-11mm

• **材质及电镀**


簧片 : 不锈钢
触点材料: 磷青铜, 镀锡
塑件 : PA66,UL94V-0

• **电气性能**


额定电压: 300V
额定电流: 10A
接触电阻: 20mΩ
绝缘电阻: 5000MΩ/DC1000V
耐电压 : AC2000V/1Min
使用线径: 28-122AWG 2.5mm²

• **机械性能**

温度范围: -40°C~+105°C
剥线长度: 10-11mm

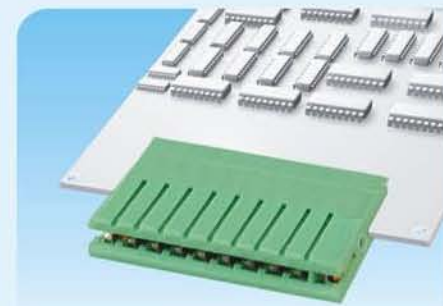

**DECB-5.0
DECB-7.5**

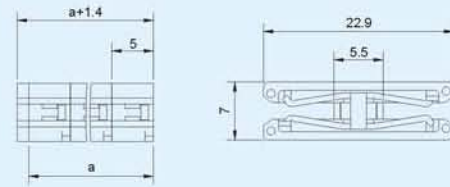

Pitch:5.0mm,7.5mm;Poles:2P~24P

• **Material**

Contact : Phosphor bronze,Tin plated
Housing : PA66,UL94V-0

• **Electrical**

Rated voltage : 300V
Rated current : 10A
Contact resistance : 20mΩ
Insulation resistance : 5000MΩ/DC1000V
Withstanding voltage: AC2000/1Min

• **Mechanical**

Temp.Range : -40°C~+105°C

• **材质及电镀**

触点材料: 磷青铜, 镀锡
塑件 : PA66,UL94V-0

• **电气性能**

额定电压: 300V
额定电流: 10A
接触电阻: 20mΩ
绝缘电阻: 5000MΩ/DC1000V
耐电压 : AC2000V/1Min

• **机械性能**

温度范围: -40°C~+105°C