





### HOW TO ORDER(订货方法):

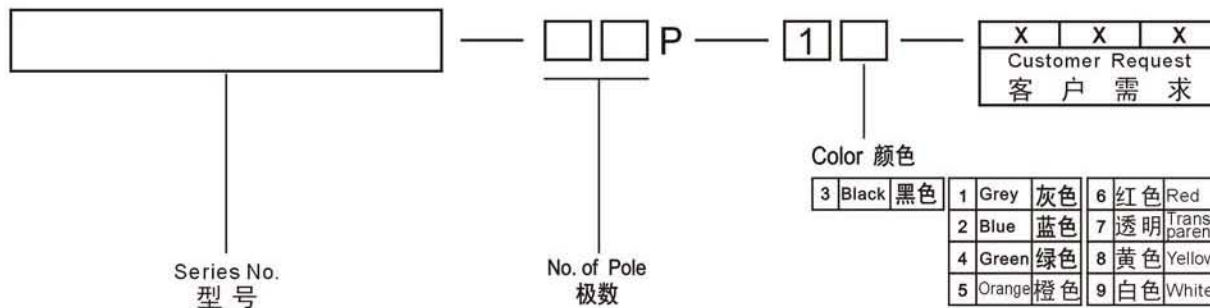


### SPECIFICATION(规格)

Materials		材质	
Housing:	PC, UL94V-2	塑件:	PC, UL94V-2
Terminal:	Brass, 1.2t, Gold-Plated	端子:	黄铜, 1.2厚 镀金
Screw:	Steel, M4 Gold-Plated	螺丝:	钢, M4 镀金
Capability		性能	
Rated:	300V / 30A	额定电压/电流:	300V / 30A
Temp. Range:	-40°C ~ +80°C	使用温度:	-40°C ~ +80°C
Withstand Voltage:	AC2000V / 1Min	耐电压:	AC2000V / 1Min
Insulation Resistance:	1000MΩ / DC500V	绝缘阻抗:	1000MΩ / DC500V
Wire Range:	18-10AWG	适用线径:	18-10AWG
Max. Torque Value:	1.2N.m 10.6Lb.in	最大锁紧扭力:	1.2N.m 10.6Lb.in


## DG21

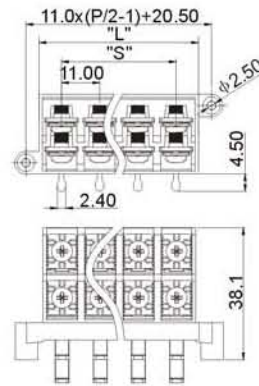


$$\begin{aligned} "S" &= 11.0 \times (P/2 - 1) \\ "L" &= 11.0 \times (P/2 - 1) + 14.00 \end{aligned}$$





## DG22

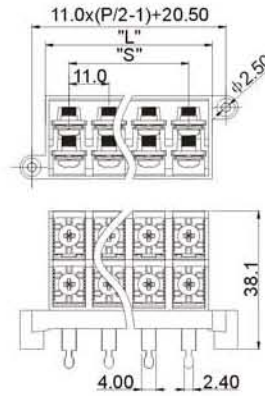


$$\begin{aligned} "S" &= 11.0 \times (P/2 - 1) \\ "L" &= 11.0 \times (P/2 - 1) + 14.00 \end{aligned}$$



## DG23

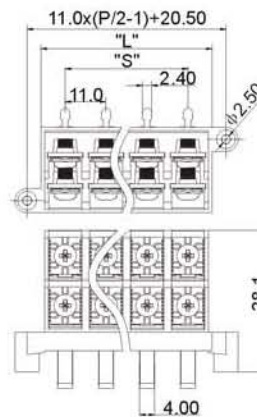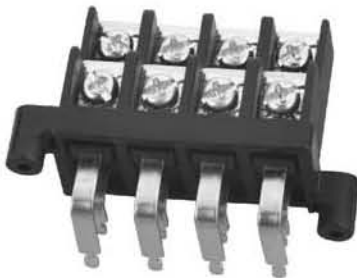


$$\begin{aligned} "S" &= 11.0 \times (P/2 - 1) \\ "L" &= 11.0 \times (P/2 - 1) + 14.00 \end{aligned}$$




Poles	4	6	8	10	12	14	16	18	20	22	24			
L(mm)	47.00	69.00	91.00	113.00	135.00	157.00	179.00	201.00	223.00	245.00	267.00			
S(mm)	33.00	55.00	77.00	99.00	121.00	143.00	165.00	187.00	209.00	231.00	253.00			

## DG21

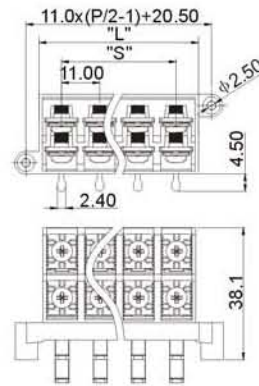


$$"S" = 11.0 \times (P/2 - 1)$$

$$"L" = 11.0 \times (P/2 - 1) + 14.00$$




## DG22

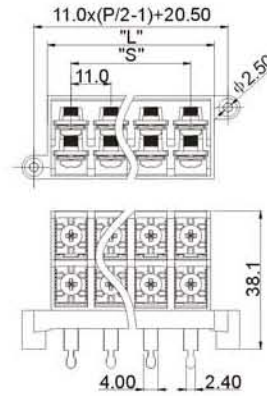


$$"S" = 11.0 \times (P/2 - 1)$$

$$"L" = 11.0 \times (P/2 - 1) + 14.00$$




## DG23

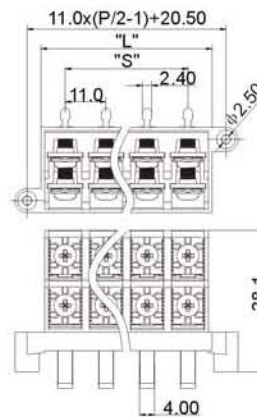

$$"S" = 11.0 \times (P/2 - 1)$$

$$"L" = 11.0 \times (P/2 - 1) + 14.00$$



Poles	4	6	8	10	12	14	16	18	20	22	24			
L(mm)	47.00	69.00	91.00	113.00	135.00	157.00	179.00	201.00	223.00	245.00	267.00			
S(mm)	33.00	55.00	77.00	99.00	121.00	143.00	165.00	187.00	209.00	231.00	253.00			