




HOW TO ORDER(订货方法):

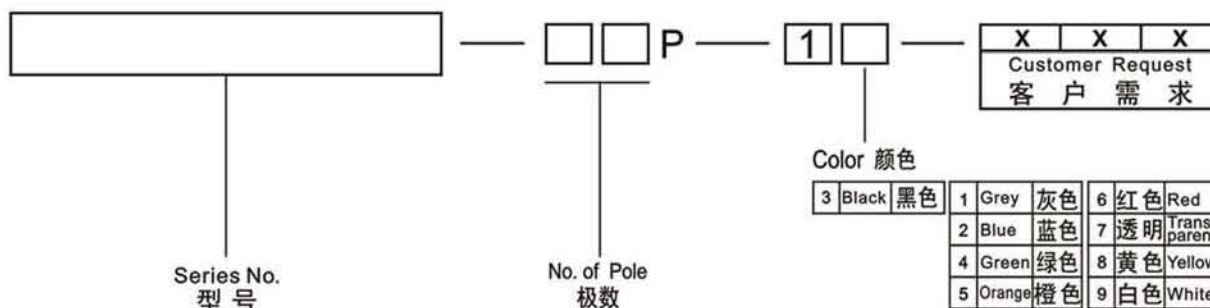

SPECIFICATION(规格)


Materials		材质	
Housing:	PA66+23%GF,UL94V-0	塑件:	PA66+23%GF, UL94V-0
Terminal:	Brass,0.8t,Tin-Plated	端子:	黄铜, 0.8厚 镀锡
Screw:	Steel,M3 Ni-Plated	螺丝:	钢, M3 镀镍
Capability		性能	
Rated:	300V / 15A	额定电压/电流:	300V / 15A
Temp.Range:	-40°C~+105°C	使用温度:	-40°C~+105°C
Withstand Voltage:	AC2000V / 1Min	耐电压:	AC2000V / 1Min
Insulation Resistance:	500MΩ / DC500V	绝缘阻抗:	500MΩ / DC500V
Wire Range:	22-14AWG	适用线径:	22-14AWG
Max.Torque Value:	0.5N.m 4.4Lb.in	最大锁紧扭力:	0.5N.m 4.4Lb.in

DG24-1


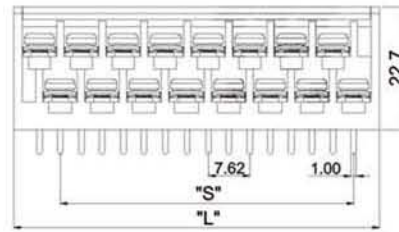


$$"S" = 7.62 \times (P/2 - 1)$$

$$"L" = 7.62 \times (P/2 - 1) + 13.35$$




DG24-2



$$"S" = 7.62 \times (P/2 - 1)$$

$$"L" = 7.62 \times (P/2 - 1) + 13.35$$

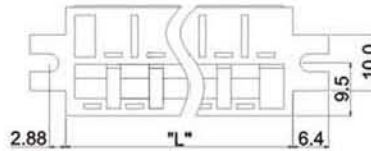

Poles	4	6	8	10	12	14	16	18	20	22	24	26	28	30
L(mm)	20.97	28.59	36.21	43.83	51.45	59.07	66.69	74.31	81.93	89.55	97.17	104.79	112.41	120.03
S(mm)	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68
Poles	32	34	36	38	40	42	44	46	48					
L(mm)	127.65	135.27	142.89	150.51	158.13	165.75	173.37	180.99	188.61					
S(mm)	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26					