



订货方法(HOW TO ORDER):

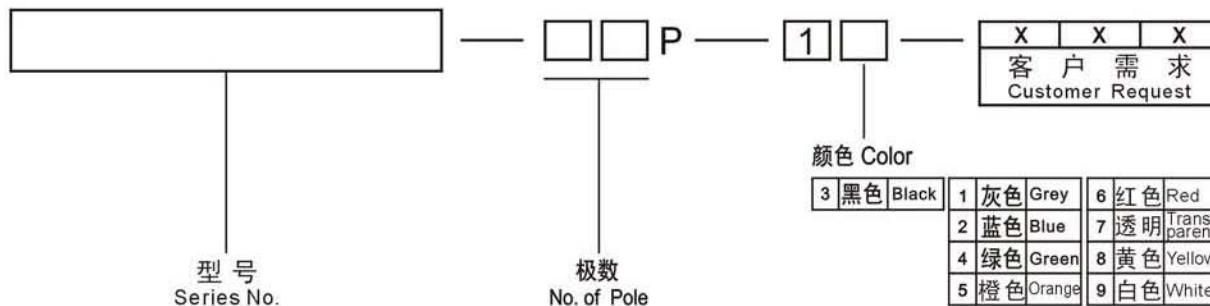


规格(SPECIFICATION)

材质		Materials	
塑件:	PA66+25%GF, UL94V-0	Housing:	PA66+25%GF, UL94V-0
端子:	黄铜, 1.0厚 镀锡	Terminal:	Brass, 1.0t, Tin-Plated
螺丝:	钢, M4 镀镍	Screw:	Steel, M4 Ni-Plated
性能		Capability	
额定电压/电流:	600V / 30A	Rated:	600V / 30A
使用温度:	-40°C~+105°C	Temp.Range:	-40°C~+105°C
耐电压:	AC2000V / 1Min	Withstand Voltage:	AC2000V / 1Min
绝缘阻抗:	500MΩ / DC500V	Insulation Resistance:	500MΩ / DC500V
适用线径:	18-10AWG	Wire Range:	18-10AWG
最大锁紧扭力:	1.2N.m 10.6Lb.in	Max.Torque Value:	1.2N.m 10.6Lb.in

DG30

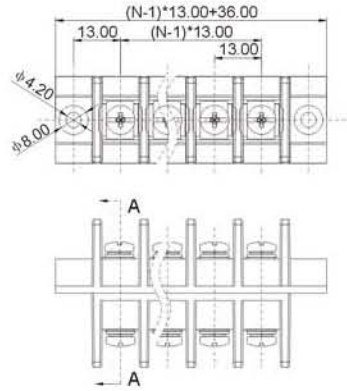

"S"=13.0x(N-1)
"L"=13.0x(N-1)+36.0



SECTION A-A


螺丝: M4
Screw: M4

额定电压/电流: 600V / 30A
Rated: 600V / 30A

适用线径: 18-10AWG
Wire Range: 18-10AWG

最大锁紧扭力: 1.2N.m 10.6Lb.in
Max. Torque Value: 1.2N.m 10.6Lb.in

DG31

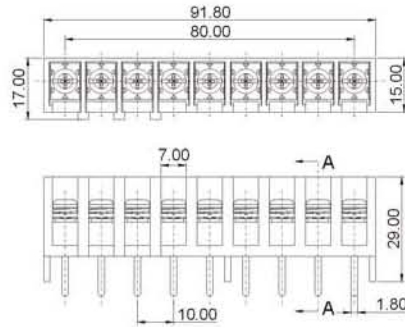

SECTION A-A

螺丝: M4
Screw: M4

额定电压/电流: 600V / 25A
Rated: 600V / 25A

适用线径: 18-10AWG
Wire Range: 18-10AWG

最大锁紧扭力: 1.2N.m 10.6Lb.in
Max. Torque Value: 1.2N.m 10.6Lb.in

DG30

Poles	2	3	4	5	6	7	8	9	10				
L(mm)	49.0	62.0	75.0	88.0	101.0	114.0	127.0	140.0	153.0				
S(mm)	13.0	26.0	39.0	52.0	65.0	78.0	91.0	104.0	117.0				