



HOW TO ORDER(订货方法):

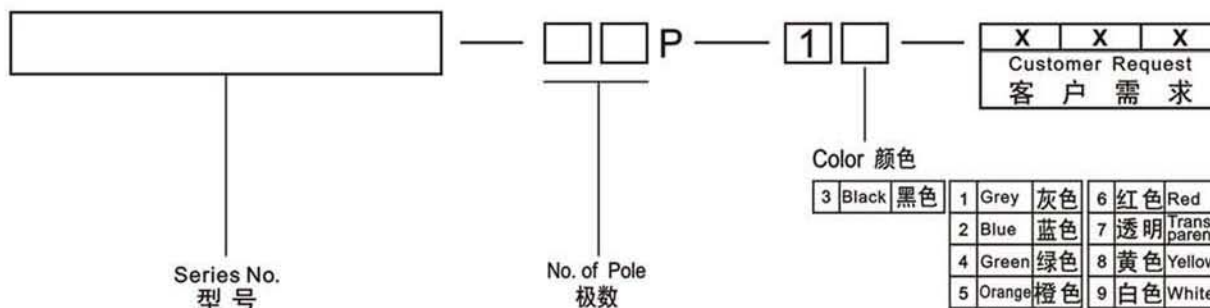

SPECIFICATION(规格)

Materials		材质	
Housing:	PA66+23%GF,UL94V-0	塑件:	PA66+23%GF, UL94V-0
Terminal:	Brass,0.8t,Tin-Plated	端子:	黄铜, 0.8厚 镀锡
Screw:	Steel,M3.5 Ni-Plated	螺丝:	钢, M3.5 镀镍
Capability		性能	
Rated:	300V / 15A	额定电压/电流:	300V / 15A
Temp.Range:	-40°C~+105°C	使用温度:	-40°C~+105°C
Withstand Voltage:	AC2000V / 1Min	耐电压:	AC2000V / 1Min
Insulation Resistance:	500MΩ / DC500V	绝缘阻抗:	500MΩ / DC500V
Wire Range:	22-14AWG	适用线径:	22-14AWG
Max.Torque Value:	0.8N.m 7.0Lb.in	最大锁紧扭力:	0.8N.m 7.0Lb.in


DG44B-1

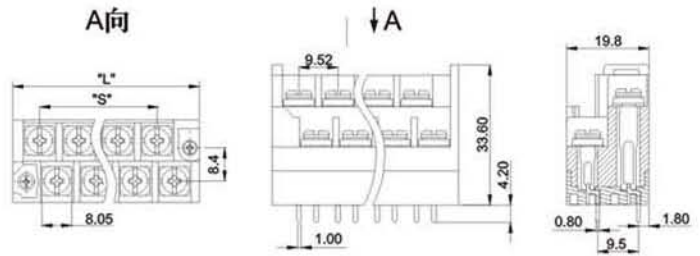

$$"S"=9.52 \times (P/2-1)$$

$$"L"=9.52 \times (P/2-1) + 17.08$$

DG44B-2

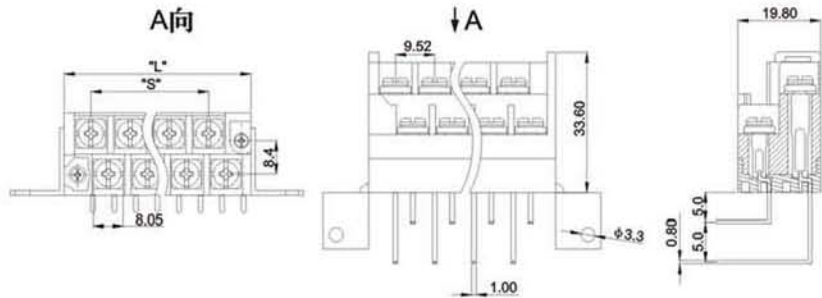

$$"S"=9.52 \times (P/2-1)$$

$$"L"=9.52 \times (P/2-1) + 17.08$$

Poles	4	6	8	10	12	14	16	18	20	22	24	26	28	30
L(mm)	26.60	36.12	45.64	55.16	64.68	74.20	83.72	93.24	102.76	112.28	121.80	131.32	140.84	150.36
S(mm)	9.52	19.04	28.56	38.08	47.60	57.12	66.64	76.16	85.68	95.20	104.72	114.24	123.76	133.28
Poles	32	34	36	38	40	42	44	46	48					
L(mm)	159.88	169.40	178.92	188.44	197.96	207.48	217.00	226.52	236.04					
S(mm)	142.80	152.32	161.84	171.36	180.88	190.40	199.92	209.44	218.96					