



### 订货方法(HOW TO ORDER):

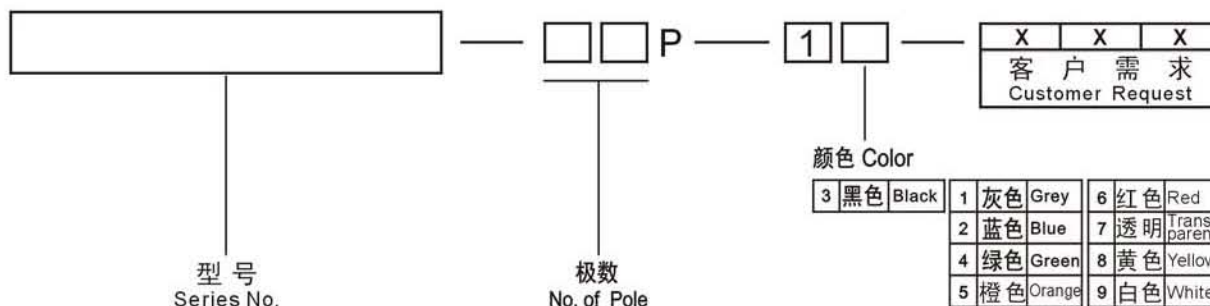

### 规格(SPECIFICATION)

材质		Materials	
塑件:	PC, UL94V-2	Housing:	PC,UL94V-2
端子:	合金,镀金	Terminal:	Alloy,Tin-Plated
螺丝:	M5/M7,钢,镀金	Screw:	M5/M7,Gold-Plated
性能		Capability	
额定电压/电流:	300V / 30A	Rated:	300V / 30A
使用温度:	-40°C~+80°C	Temp.Range:	-40°C~+80°C
耐电压:	AC2000V / 1Min	Withstand Voltage:	AC2000V / 1Min
绝缘阻抗:	1000MΩ / DC500V	Insulation Resistance:	1000MΩ / DC500V
适用线径:	18-12AWG	Wire Range:	18-12AWG
最大锁紧扭力:	2.0N.m 17.5Lb.in	Max.Torque Value:	2.0N.m 17.5Lb.in

## EA27-1

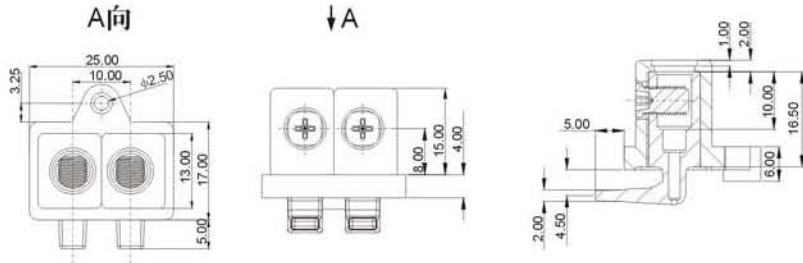


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max.Torque Value: 2.0N.m 17.5Lb.in

## EA27-2

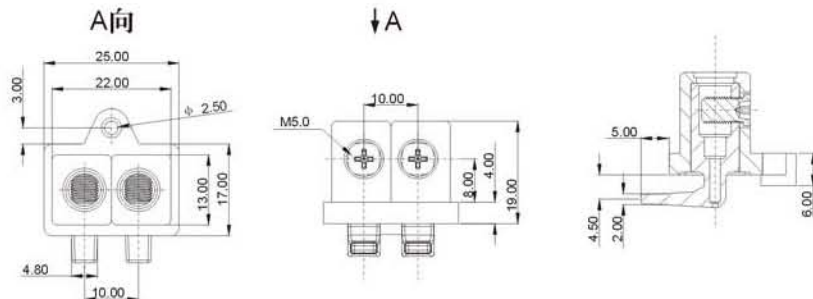


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max.Torque Value: 2.0N.m 17.5Lb.in

## EA28-1

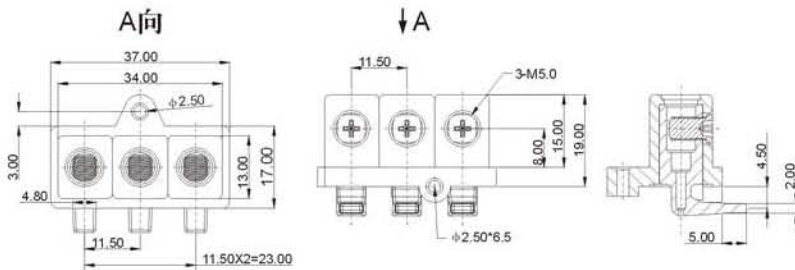


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max.Torque Value: 2.0N.m 17.5Lb.in

## EA28-2

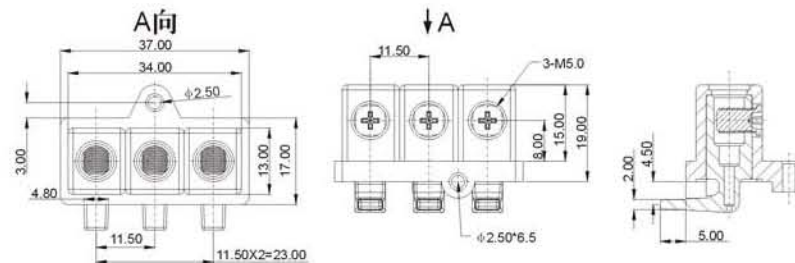


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max.Torque Value: 2.0N.m 17.5Lb.in

## EA29-1

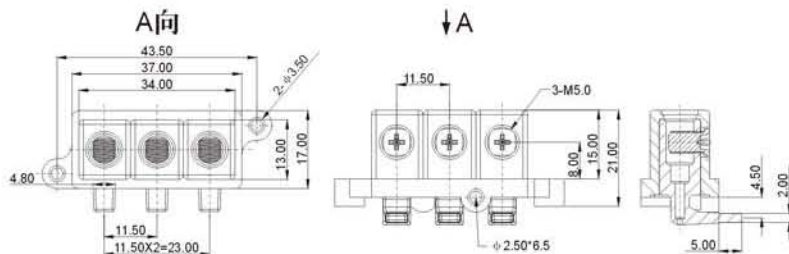


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA29-2

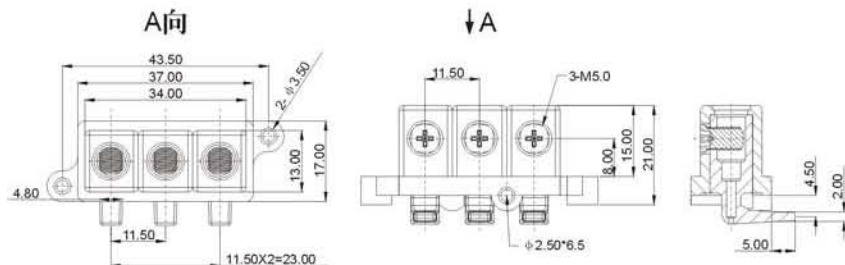


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA30-1

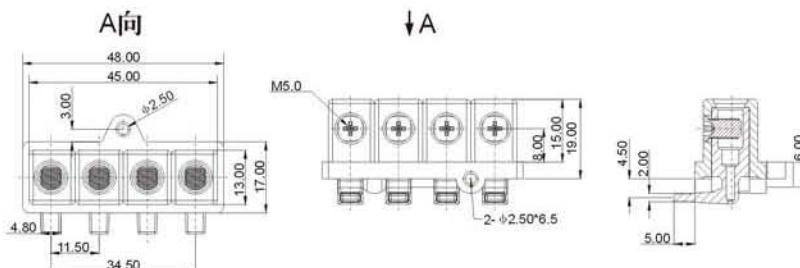


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA30-2

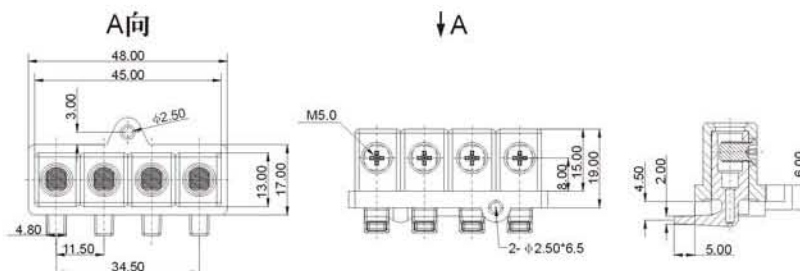


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA31-1

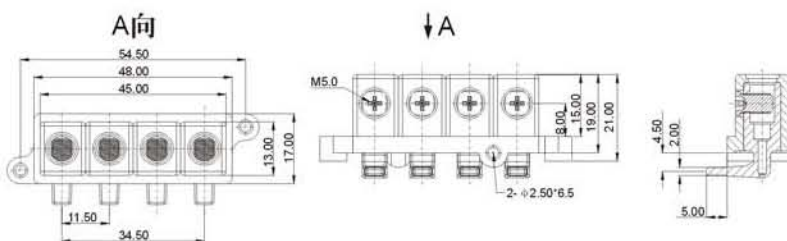


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA31-2

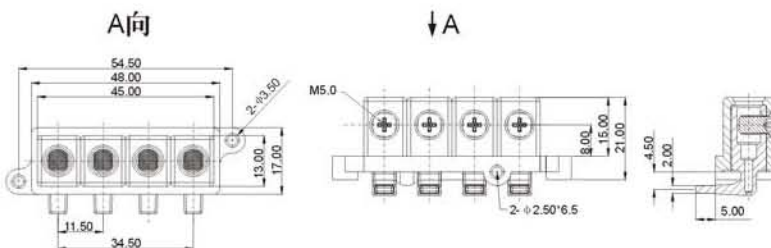


螺丝: M5  
Screw: M5

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA32-1

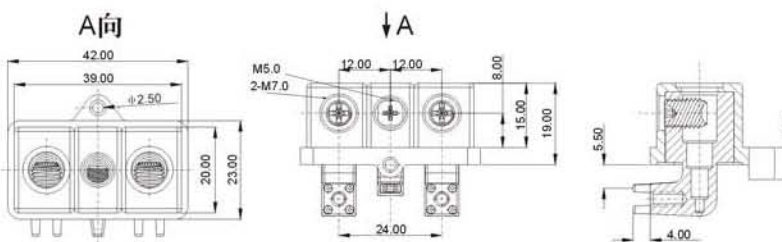


螺丝: M5 / M7  
Screw: M5 / M7

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA32-2

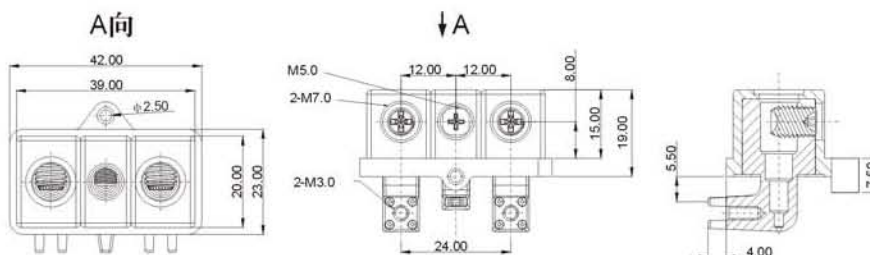




螺丝: M5 / M7  
Screw: M5 / M7

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA33-1






螺丝: M5 / M7  
Screw: M5 / M7

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA33-2






螺丝: M5 / M7  
Screw: M5 / M7

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-12AWG  
Wire Range: 18-12AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA34-2



螺丝: M5  
Screw: M5

额定电压/电流: 500V / 40A  
Rated: 500V / 40A


适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in



## EA35-1



A向



↓A



螺丝: M5  
Screw: M5

额定电压/电流: 500V / 40A  
Rated: 500V / 40A


适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in



## EA35-2



A向



↓A



螺丝: M5  
Screw: M5

额定电压/电流: 500V / 40A  
Rated: 500V / 40A


适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in



## EA36-1



A向



↓A




螺丝: M5  
Screw: M5

额定电压/电流: 500V / 40A  
Rated: 500V / 40A

适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA36-2

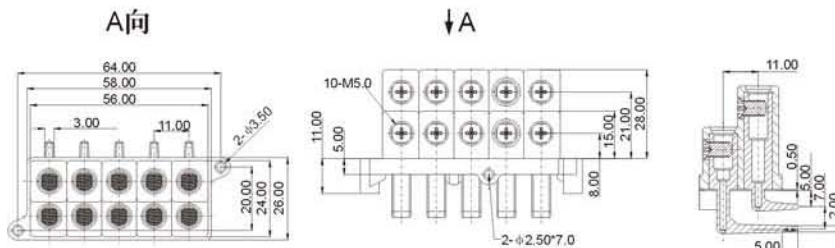


螺丝: M5  
Screw: M5

额定电压/电流: 500V / 40A  
Rated: 500V / 40A

适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA37-1

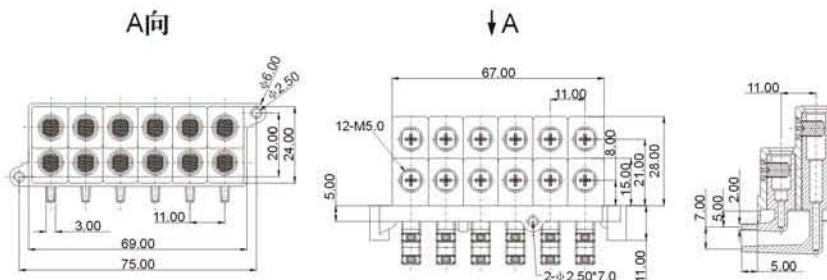


螺丝: M5  
Screw: M5

额定电压/电流: 500V / 40A  
Rated: 500V / 40A

适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

## EA37-2

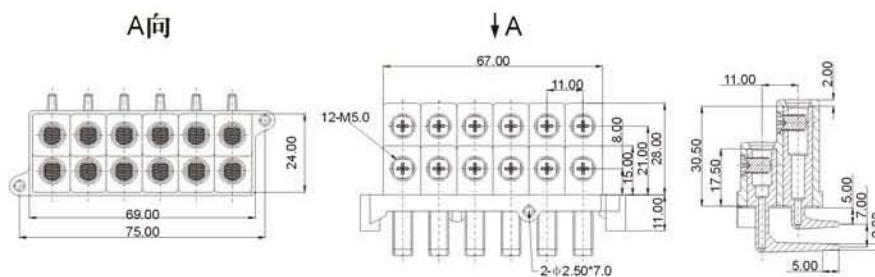



螺丝: M5  
Screw: M5

额定电压/电流: 500V / 40A  
Rated: 500V / 40A

适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 2.0N.m 17.5Lb.in  
Max. Torque Value: 2.0N.m 17.5Lb.in

# EA14

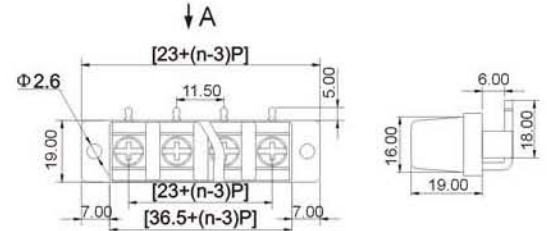

极数Poles: n=3,4,7,8



螺丝: M4  
Screw: M4

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 22-12AWG  
Wire Range: 22-12AWG

最大锁紧扭力: 1.2N.m 10.6Lb.in  
Max. Torque Value: 1.2N.m 10.6Lb.in

# EA15

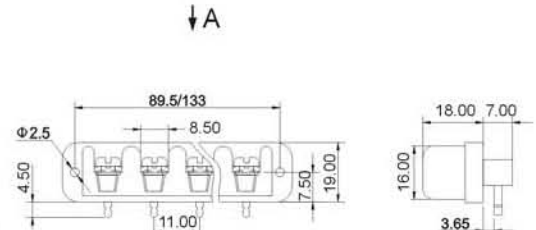

极数Poles: 7,11



螺丝: M4  
Screw: M4

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 22-12AWG  
Wire Range: 22-12AWG

最大锁紧扭力: 1.2N.m 10.6Lb.in  
Max. Torque Value: 1.2N.m 10.6Lb.in

# EA16

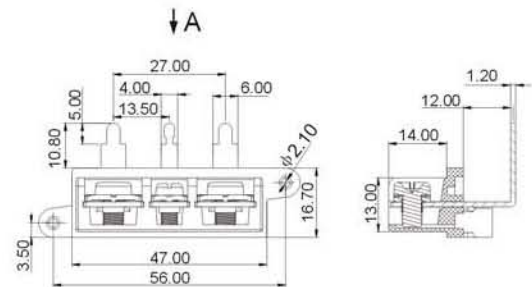

螺丝: M4  
Screw: M4




额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 22-12AWG  
Wire Range: 22-12AWG

最大锁紧扭力: 1.2N.m 10.6Lb.in  
Max. Torque Value: 1.2N.m 10.6Lb.in



## EA17






螺丝: M4  
Screw: M4

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 22-12AWG  
Wire Range: 22-12AWG

最大锁紧扭力: 1.2N.m 10.6Lb.in  
Max. Torque Value: 1.2N.m 10.6Lb.in

## EA18-1



极数Poles: n=2-12




螺丝: M4  
Screw: M4

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 1.2N.m 10.6Lb.in  
Max. Torque Value: 1.2N.m 10.6Lb.in

## EA18-2



极数Poles: n=2-12




螺丝: M4  
Screw: M4

额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 18-10AWG  
Wire Range: 18-10AWG

最大锁紧扭力: 1.2N.m 10.6Lb.in  
Max. Torque Value: 1.2N.m 10.6Lb.in

## EA20



螺丝: M4  
Screw: M4


额定电压/电流: 300V / 30A  
Rated: 300V / 30A

适用线径: 22-12AWG  
Wire Range: 22-12AWG


最大锁紧扭力: 1.2N.m 10.6Lb.in  
Max. Torque Value: 1.2N.m 10.6Lb.in




K1 Tin-Plated

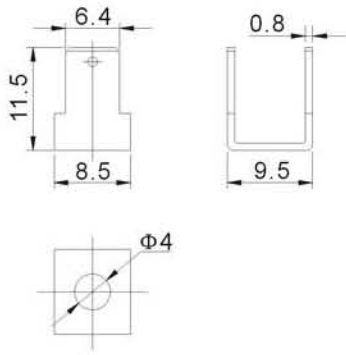


K5 Tin-Plated

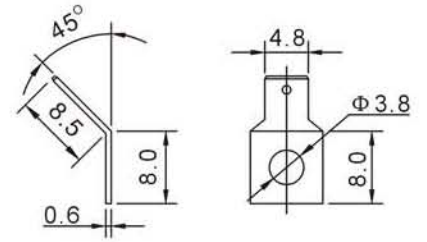


K2 Tin-Plated




K6 Tin-Plated

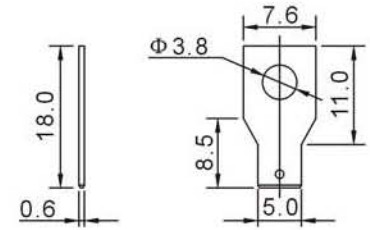


K3 Tin-Plated

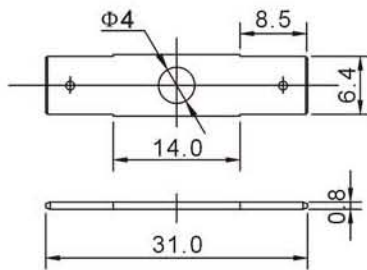


K7 Tin-Plated

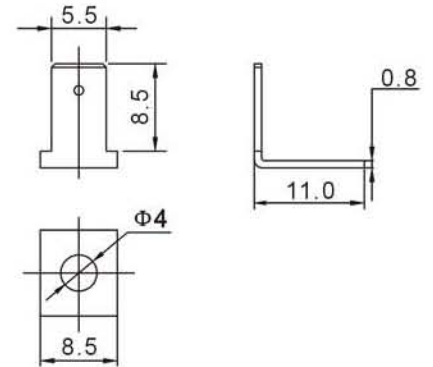

K4 Tin-Plated




K8 Tin-Plated






K9 Tin-Plated




Rating:15A  
Screw:M4\*9  
Terminal:Tin-Plated  
Brass

K13 Tin-Plated

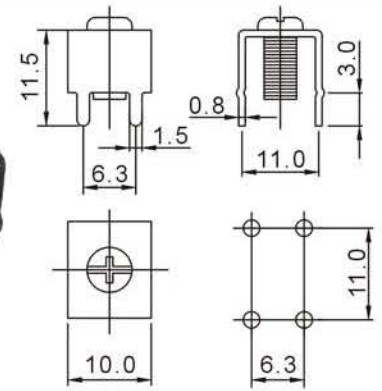


K10 Tin-Plated




Rating:15A  
Screw:M3.5\*6  
Terminal:Tin-Plated  
Brass

K14 Tin-Plated

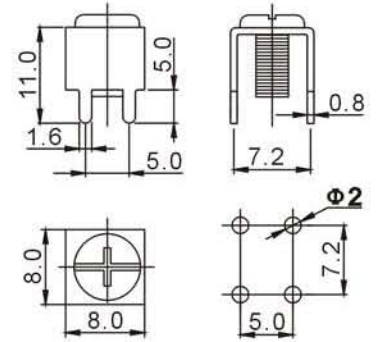


K11 Tin-Plated




Rating:15A  
Screw:M3.5\*6  
Terminal:Tin-Plated  
Brass


K15 Tin-Plated

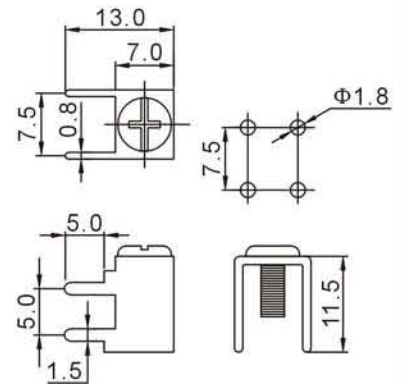

K12 Tin-Plated




K16 Tin-Plated







K17 Tin-Plated




K21 Tin-Plated

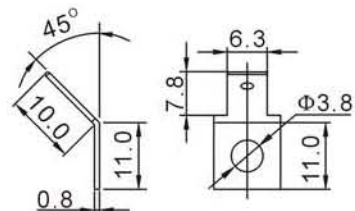

K18 Tin-Plated




K22 Tin-Plated




T=0.4



K19 Tin-Plated




K23 Tin-Plated



T=0.4




K20 Tin-Plated



T=0.8



K24 Tin-Plated



T=0.4