


PERFORMANCE:

- RESISTING 400 °C MAX CONTINUOUSLY
- TERMINAL STRENGTH: 20KG MIN
- RESISTANCE TOLERANCE: BELOW 5 Ω ± 10%, 5 Ω AND ABOVE ± 5%

- HEAT DISSIPATION IS ULTRALLY EXCELLENT
- SMALL SIZE VERSUS LARGE CURRENTS


Special material coating (three types to choose from)
 - Ceramic (1,200 °C) - Silicone (350 °C) - Enamel (500 °C)

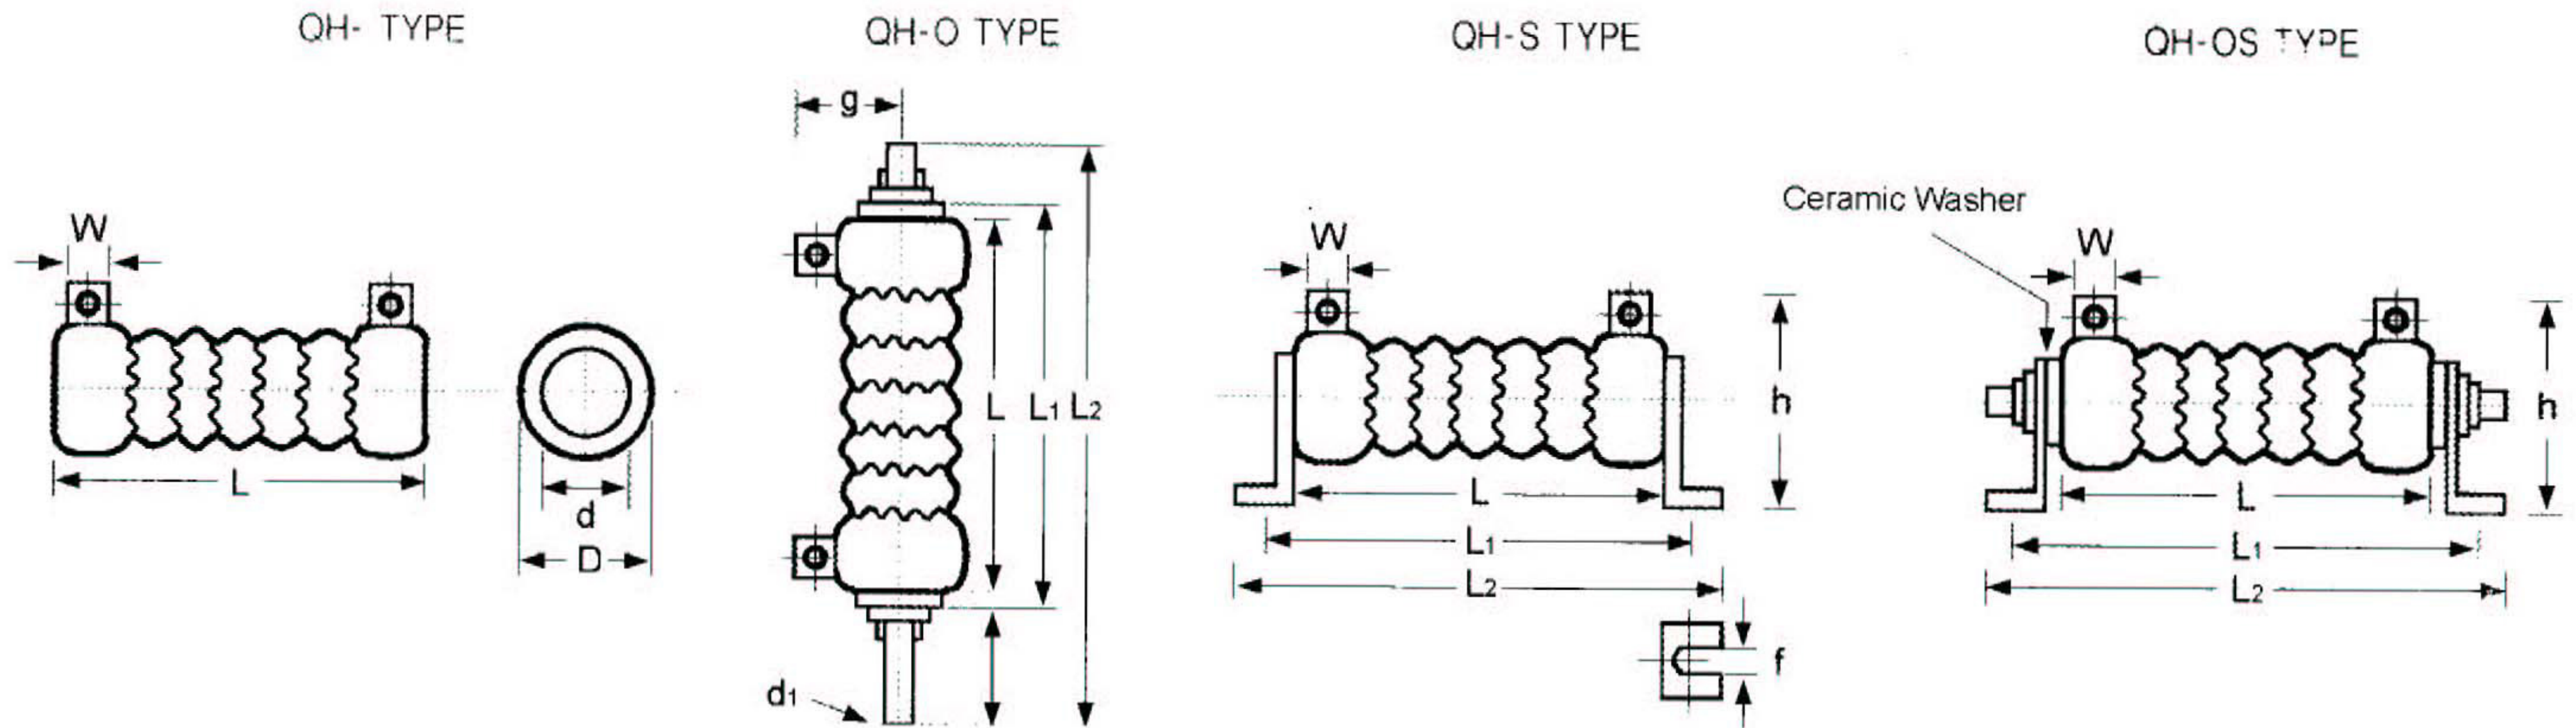


形式 TYPE	電阻值範圍(Ω) RESISTANT RANGE	寸法 DIMENSION (mm)							O TYPE		S TYPE			OS TYPE		
		L	D	d	g	W	d1	f	L1	L2	L1	L2	h	L1	L2	h
QH 120W	0.02 Ω ~ 4 Ω	115	33	16	32	8	5	5.2	129	150	133	157	58	145	171	58
QH 150W	0.03 Ω ~ 5 Ω	140	33	16	32	8	5	5.2	154	173	158	182	58	170	196	58
QH 180W	0.03 Ω ~ 6 Ω	165	33	16	32	8	5	5.2	179	200	183	207	58	195	221	58
QH 225W	0.04 Ω ~ 8 Ω	195	33	16	32	8	5	5.2	209	230	213	237	58	225	251	58
QH 300W	0.05 Ω ~ 10 Ω	254	33	16	32	8	5	5.2	268	288	272	296	58	285	310	58
QH 450W	0.06 Ω ~ 12 Ω	254	48	28	47	15		9.15	270		274	314	90	290	330	90
QH 600W	0.08 Ω ~ 15 Ω	330	48	28	47	15		9.15	345		349	390	90	365	406	90
QH 750W	0.1 Ω ~ 20 Ω	303	58	35	52	15		9.15						358	378	95
QH 850W	0.2 Ω ~ 25 Ω	330	58	35	52	15		9.15						385	405	95
QH 1000W	0.3 Ω ~ 30 Ω	390	58	35	52	15		9.15						445	465	95
QH 1500W	0.4 Ω ~ 35 Ω	500	58	35	52	15		9.15						555	575	95
QH 2250W	0.5 Ω ~ 40 Ω	500	72	40	52	15		9.15						584	608	130
QH 3000W	0.7 Ω ~ 50 Ω	650	72	40	52	15		9.15						734	758	130

* Specifications Custom made

SURFACE TEMP. VS POWER LOAD

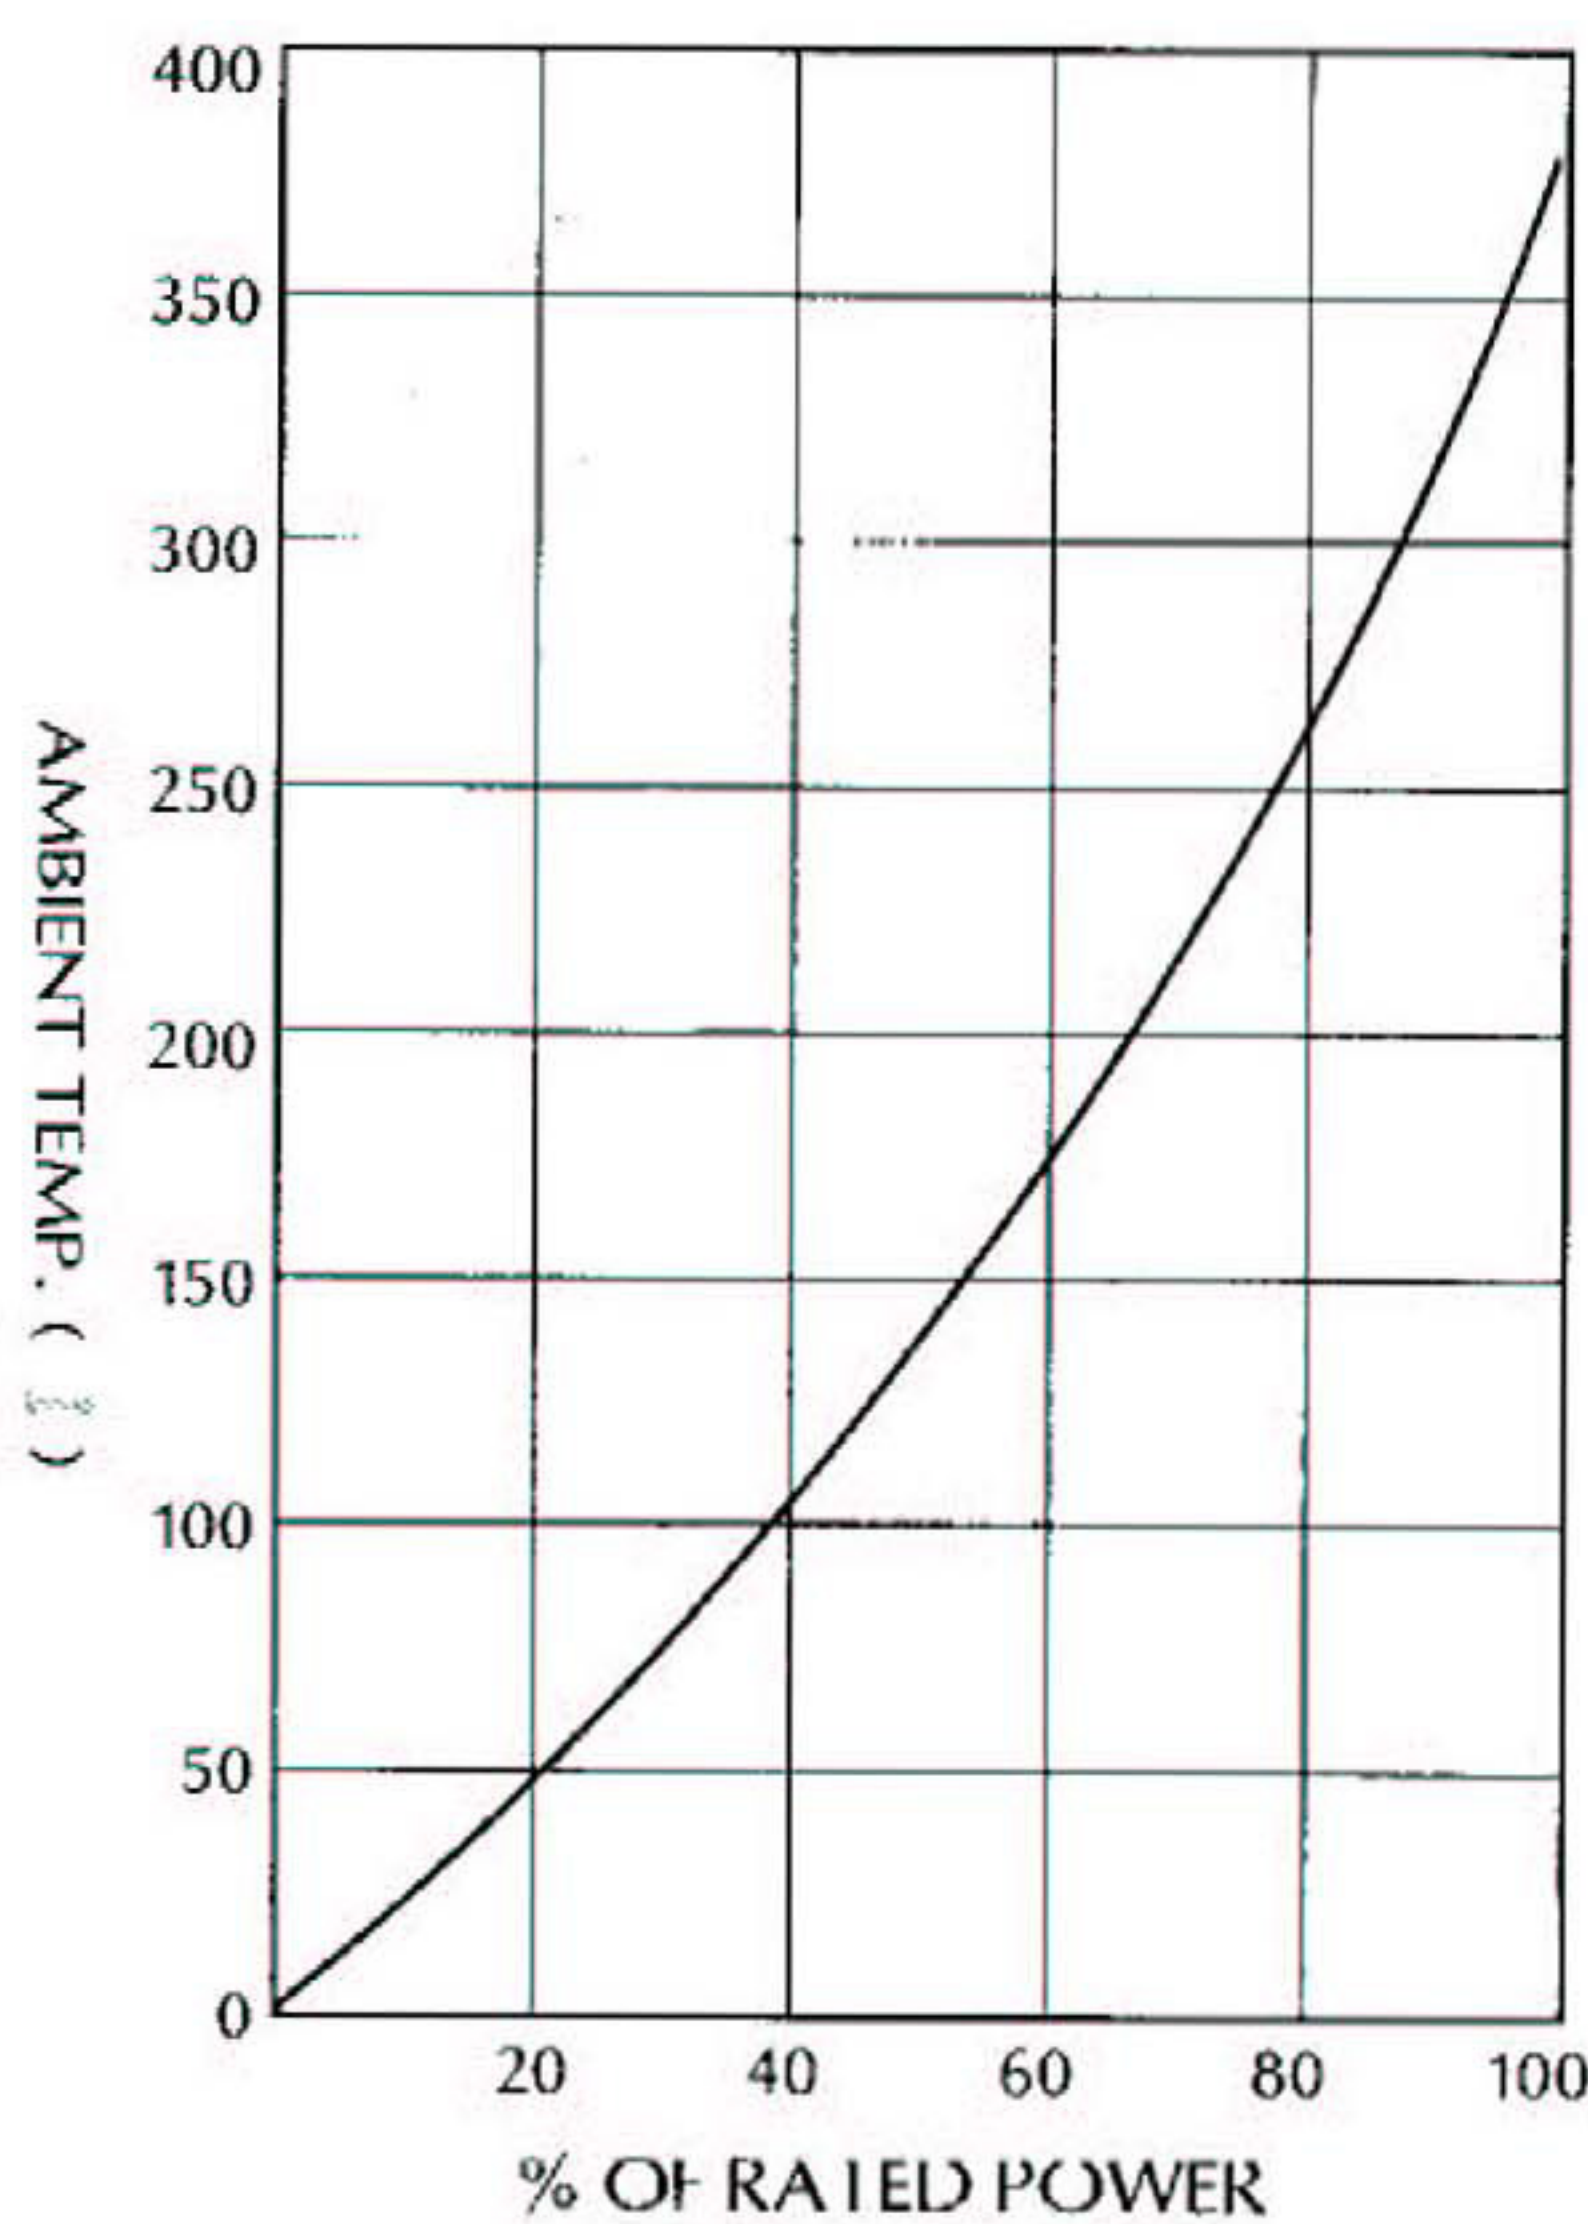

HOW TO ORDER

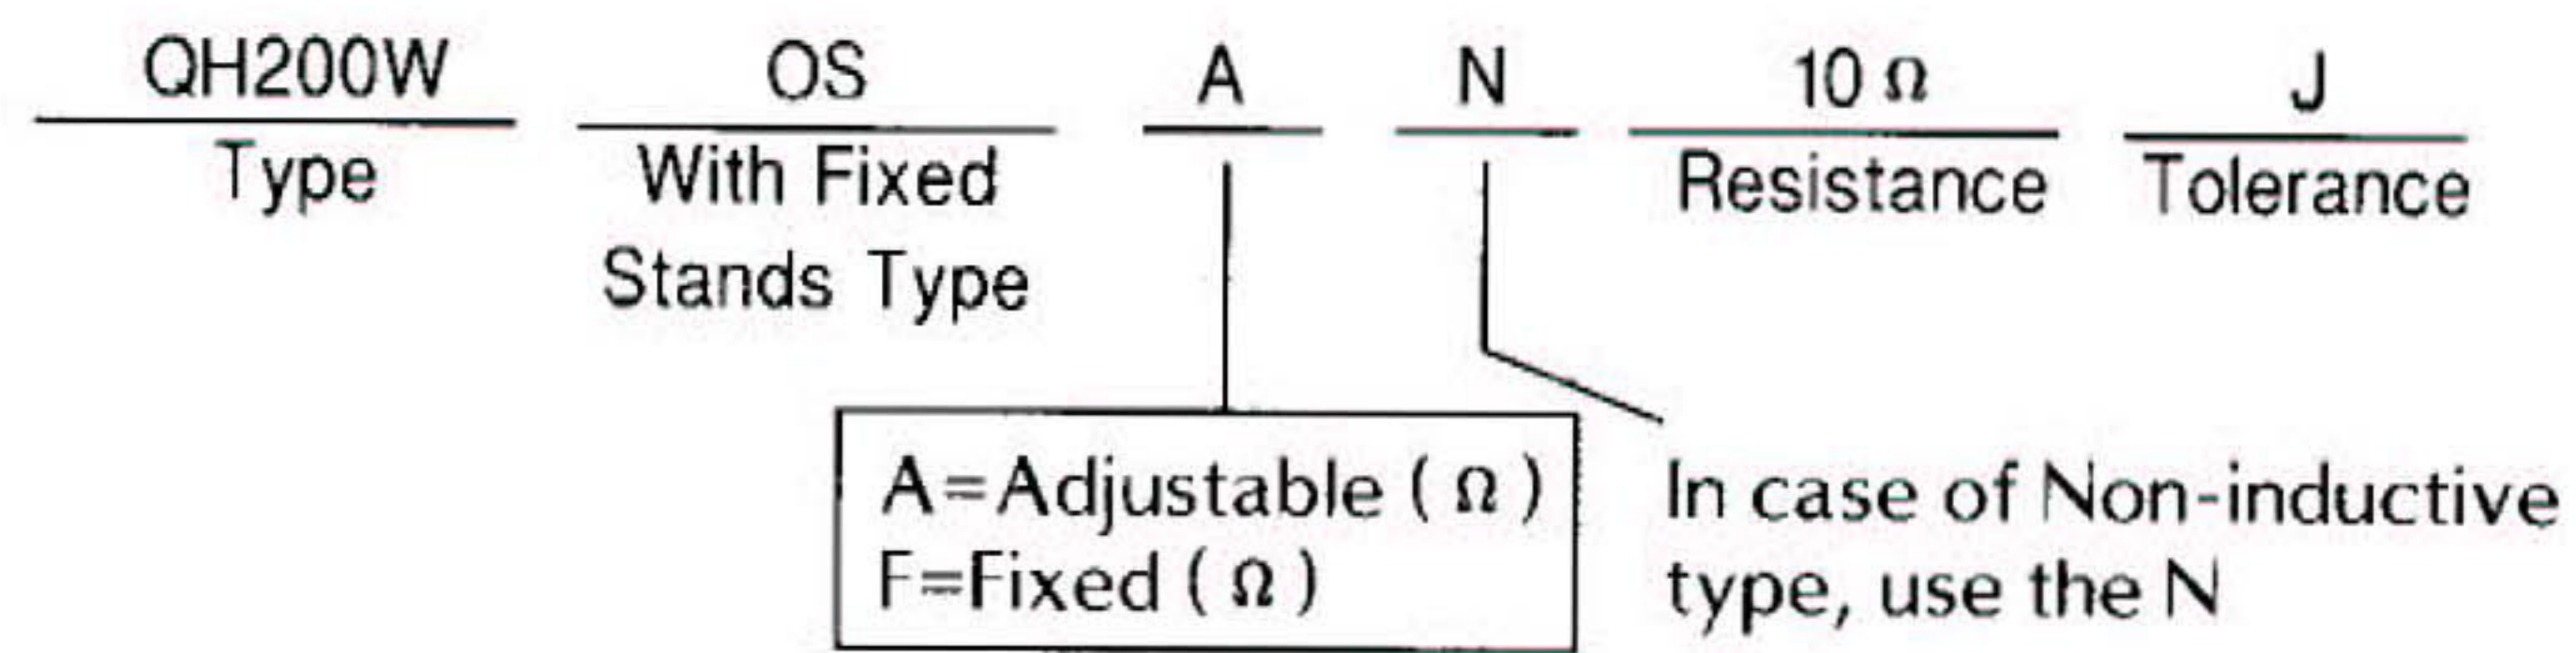

Resistance Tolerance

D	± 0.5%
F	± 1%
G	± 2%
H	± 3%
J	± 5%
K	± 10%

