


### Dimensions

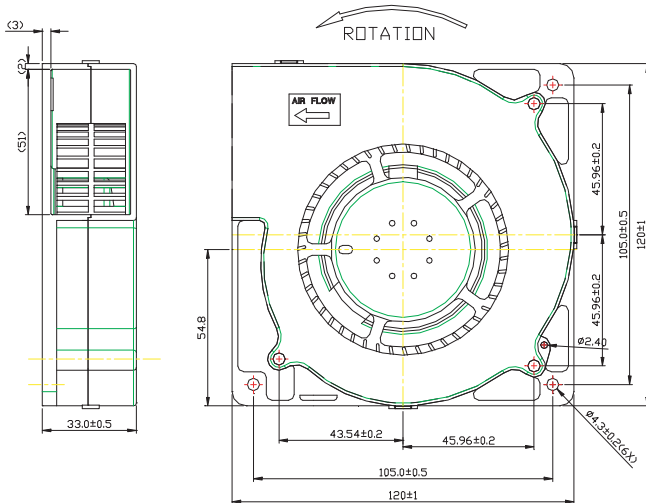


Air exhaust over struts. Rotational direction CCW looking at rotor.

Brushless DC Motor	Bearing Type
Weight: 250g	Ceramic
Impedance protected	
Lead wire UL 1007 AWG 24	

\* All fans are with electronic protection against reverse polarity. The fan only operates when the polarity is correct.

### Performance Curves

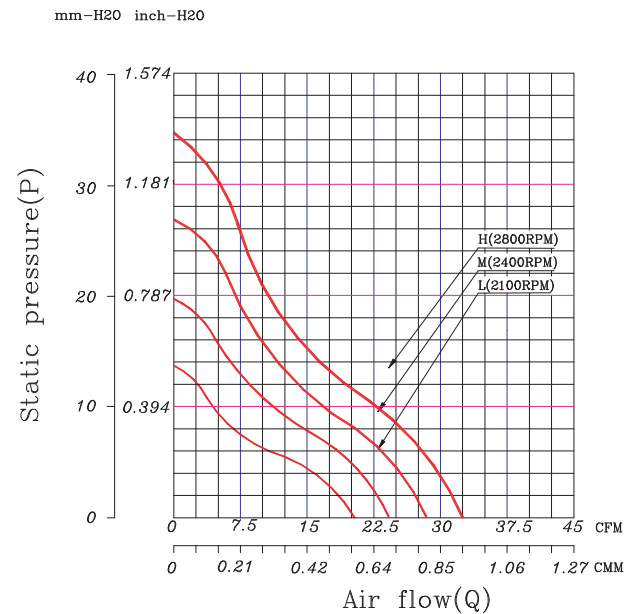

Function Options	
<input type="checkbox"/> Frequency Generator	<input type="checkbox"/> Auto Restart
<input type="checkbox"/> Temperature Control	<input type="checkbox"/> Rotation Detection

\* Please contact us for PWM function availability.

\* Please contact us for IP55 availability.

\* Safety Approval: CE, UL, TUV

### Specifications

Model	Rated Voltage (VDC)	Rated Current (Amp)	Input Power (Watts)	Nominal Speed (RPM)	Airflow (CFM)	Static Pressure (inch -H2O)	Noise Level (dBA)
FAN12033C12HH	12	1.20	14.40	3200	32.53	1.37	53.60
FAN12033C12H	12	0.90	10.80	2800	28.46	1.05	50.70
FAN12033C12M	12	0.60	7.20	2400	24.40	0.77	47.53
FAN12033C12L	12	0.45	5.40	2000	20.33	0.54	43.40

\* Specifications are subject to change without prior notice.

\* Check with your distributor for models available.