

Features


- Load Life : 105°C 1000~2000 hours.
- For high density mounting.
- Low impedance at 100kHz.

**SPECIFICATION**

Item	Characteristic													
Operation Temperature Range	-55 ~ +105°C													
Rated Working Voltage	6.3 ~ 50VDC													
Capacitance Tolerance (120Hz 20°C)	±20%(M)													
Leakage Current (20°C)	$I \leq 0.01CV$ or $3 (\mu A)$					I : Leakage Current (μA)								
	*Whichever is greater after 2 minutes					C : Rated Capacitance (μF)								
Surge Voltage (20°C)	W.V.		6.3	10	16	25	35							
	S.V.		8	13	20	32	44							
Add 0.02 per 1000 μF for more than 1000 μF														
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.		6.3	10	16	25	35							
	tan δ	$\phi 4 \sim \phi 6.3$		0.24	0.20	0.16	0.14							
		$\phi 8 \sim \phi 10$		0.28	0.24	0.20	0.16							
Impedance ratio at 120Hz														
Low Temperature Stability	Rated Voltage (V)		6.3	10	16	25	35							
	-25°C / +20°C		3	2	2	2	2							
	-55°C / +20°C		5	4	4	3	3							
After hours ($\phi D \leq 6.3\text{mm}$ 1000 hours, $\phi D \geq 8\text{mm}$ 2000 hours) application of WV at +105°C the capacitor shall meet the following limits.														
Load Life	Capacitance Change		$\leq \pm 25\%$ of initial value											
	Dissipation Factor		$\leq 200\%$ of initial specified value											
	Leakage current		\leq initial specified value											
At +105°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)														
Capacitor placed on a 250°C hot plate for 30 seconds with their electrode terminals facing downward will fulfill the following conditions after being cooled to room temperature.														
Resistance to Soldering Heat	Capacitance Change		$\leq \pm 10\%$ of initial value											
	Dissipation Factor		\leq initial specified value											
	Leakage current		\leq initial specified value											

DIMENSIONS (mm)

D	L	A	H	I	W	P	K
4.0	5.8	4.3	5.5MAX	1.8	0.65 ± 0.1	1.0	$0.35^{+0.15}_{-0.20}$
5.0	5.8	5.3	6.5MAX	2.2	0.65 ± 0.1	1.5	$0.35^{+0.15}_{-0.20}$
6.3	5.8	6.6	7.8MAX	2.6	0.65 ± 0.1	2.1	$0.35^{+0.15}_{-0.20}$
6.3	7.7	6.6	7.8MAX	2.6	0.65 ± 0.1	2.1	$0.35^{+0.15}_{-0.20}$
8.0	10.2	8.3	10.0MAX	3.4	0.90 ± 0.2	3.1	0.70 ± 0.2
10.0	10.2	10.3	12.0MAX	3.5	0.90 ± 0.2	4.6	0.70 ± 0.2

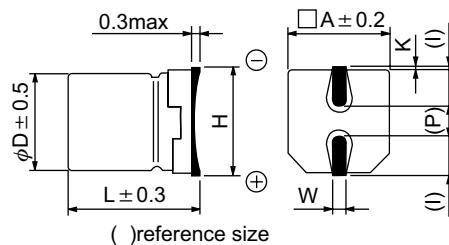

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
 Max impedance : Ω 20°C 100kHz
 Max ripple current : mA(rms) 105°C 100kHz